

(12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(19) World Intellectual Property Organization
International Bureau



(43) International Publication Date
26 April 2001 (26.04.2001)


PCT

(10) International Publication Number
WO 01/29991 A2

- (51) International Patent Classification⁷: **H04B 10/00** (74) Agent: **PAULEY, Nicholas, J.**; Christie, Parker & Hale, LLP, 350 West Colorado Boulevard, 5th floor, P.O. Box 7068, Pasadena, CA 91109-7068 (US).
- (21) International Application Number: **PCT/US00/29136**
- (22) International Filing Date: 20 October 2000 (20.10.2000) (81) Designated States (*national*): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, BZ, CA, CH, CN, CR, CU, CZ, DE, DK, DM, DZ, EE, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NO, NZ, PL, PT, RO, RU, SD, SE, SG, SI, SK, SL, TJ, TM, TR, TT, TZ, UA, UG, US, UZ, VN, YU, ZA, ZW.
- (25) Filing Language: English
- (26) Publication Language: English
- (30) Priority Data: 60/160,501 20 October 1999 (20.10.1999) US (84) Designated States (*regional*): ARIPO patent (GH, GM, KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, CH, CY, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GW, ML, MR, NE, SN, TD, TG).
- (71) Applicant (*for all designated States except US*): **BROAD-COM CORPORATION** [US/US]; 16215 Alton Parkway, Irvine, CA 92618 (US).
- (72) Inventor; and
(75) Inventor/Applicant (*for US only*): **AGAZZI, Oscar, E.** [AR/US]; 16215 Alton Parkway, Irvine, CA 92618 (US).
- Published:
— Without international search report and to be republished upon receipt of that report.

[Continued on next page]

(54) Title: METHOD, APPARATUS AND SYSTEM FOR HIGH-SPEED TRANSMISSION ON FIBER OPTIC CHANNEL

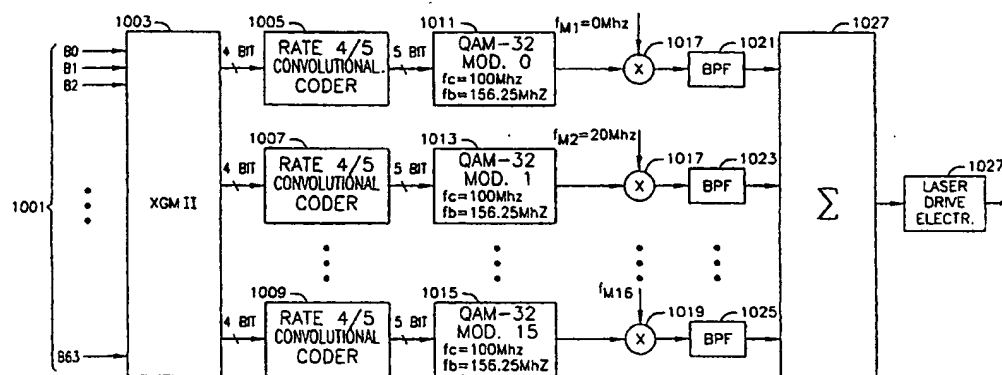

(57) Abstract: Multi-carrier modulation fiber optic systems constructed using a series of electrical carriers, modulating the data on the electrical carriers and combining the carriers to form a wideband signal. The wideband signal can then be intensity modulated on a laser and coupled to a fiber optic channel. A receiver may then receive the laser signal from the fiber optic channel and convert it into an electrical signal. Multi-carrier modulation may be applied to existing fiber channels, which may be of lower quality. Existing fiber channels may have characteristics which prevent or restrict the transmission of data using intensity modulation at certain frequencies. An adaptive multi-carrier modulation transmitter may characterize an existing fiber optic channel and ascertain the overall characteristics of the channel. The transmitter and receiver can then be configured to use various bandwidths and various modulations in order to match the transfer characteristic of the fiber channel. A series of adaptive multi-carrier modulation transmitters and receivers can be integrated on a single integrated circuit. If multiple adaptive receivers and transmitters are integrated on a single integrated circuit, they may be used to upgrade existing networks by adding different wavelength lasers for the transmission of data in order to achieve any capacity desired. Each receiver and transmitter may characterize the fiber for its particular wavelength laser and may configure the modulation and bandpass to the fiber's characteristics.

WO 01/29991 A2



For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.

**METHOD, APPARATUS AND SYSTEM FOR
HIGH-SPEED TRANSMISSION ON FIBER OPTIC CHANNEL**

FIELD OF THE INVENTION

The present invention relates to methods and apparatus for the transfer of high rates of data over a fiber optic channels, and in particular embodiments to methods and apparatus which utilize existing fiber optics systems to achieve high data transfer rates.

BACKGROUND OF THE INVENTION

The amount of data carried on fiber optic systems continues to increase. The IEEE (Institute of Electrical and Electronics Engineers) 802.3ae task force is currently working on the definition of a 10 gigabit per second standard for Ethernet applications. Although optical transmission at 10 gigabits per second is possible with current technology, the price of obtaining a 10 gigabit per second data rate may currently be very high because of the necessity of using costly optical components.

Inexpensive optical components, such as fibers and lasers, may result in optical channels with limited bandwidth, nulls, significant noise, distortion and multi-mode transmission characteristics. These characteristics may be problematical when attempting to achieve high data rates. Additionally, some of the fiber systems already in place comprise fibers and components of lower quality than are currently available in modern fiber optic systems. The characteristics of these systems may also be problematical when attempting to increase the transmission rates over such systems. There is therefore a need in the art to improve transmission capability of lower quality fiber optic systems through the use of inexpensive electronics. There is also a need for the use of channel coding and bandwidth efficient modulation techniques to overcome the limitations of low quality optical channels and result in higher transmission rates and reduced system costs.

SUMMARY OF THE INVENTION

Apparatuses for transmitting and receiving data on a fiber channel are disclosed. An example transmitting apparatus comprises an input that receives a digital signal to be transmitted. The apparatus also comprises a plurality of programmable modulators each configured to accept a portion of the digital signal to be transmitted, and to modulate the portion of the digital signal accepted. The modulators communicate with a plurality of mixers, each mixer coupled to the output of one of the programmable modulators to accept a modulated signal and mix it with a mixer frequency. The mixed frequencies are then coupled into a plurality of lowpass filters that filter the output of the mixers. A summation unit then combines the output of the mixers into a single signal.

An example receiving apparatus comprises an input that receives a transmitted optical

1 signal and converts it into an electrical signal. The receiving apparatus also comprises a plurality
of programmable mixers which accept the received electrical signal. The mixers are coupled to
programmable frequency sources. The mixed frequencies are then coupled into a plurality of
bandpass filters that filter the output of the mixers. The filtered signals are then provided to
5 programmable demodulators, which will demodulate the signal according to the modulation used
by the transmit apparatus. The demodulated signals are then provided to a XGMII (Ten Gigabit
Media Independent Interface), which combines the demodulated signals into a parallel bit stream.

10 BRIEF DESCRIPTION OF THE DRAWINGS

The following descriptions refer to drawings in which consistent numbers refer to like
elements throughout.

Figure 1A is a graphical illustration showing a light pulse transmitted through a
multimode fiber optic channel and resulting received pulses.

15 Figure 1B is a graph of an exemplary frequency response of the optical channel exhibiting
nulls.

Figure 1C is a graph illustrating the impulse response of a multimode fiber channel in an
"overfilled launch conditions."

Figure 1D is a block diagram of an exemplary fiber optic data transmission system.

20 Figure 2A is a block diagram of a multi-carrier modulation (MCM) transmitter.

Figure 2B is a block diagram of a digital implementation of a QAM-16 modulator, such
as illustrated in figure 2A.

Figure 2C is a block diagram of an analog implementation of a QAM-16 modulator, such
as illustrated in figure 2A.

25 Figure 3 is a block diagram illustrating a multi-carrier modulation receiver.

Figure 4 is a block diagram of an alternate implementation of a multi-carrier modulation
transmitter.

Figure 5 is a block diagram of an alternate implementation of multi-carrier modulation
receiver as may be used the alternative implementation of the MCM transmitter illustrated in
30 Figure 4.

Figure 6 is a graph of intensity vs. frequency representing the transfer function of an
exemplary fiber optic channel.

Figure 7A is a block diagram of a circuit implementation as may be used with fiber
channels exhibiting nulls and/or noisy bands.

35 Figure 7B is a flow diagram illustrating the process by which an existing fiber channel
may be characterized.

Figure 8 is a block diagram of a receiver as may be used with the transmitter illustrated
in Figure 7A.

1 Figure 9 is a block diagram illustrating the use of a set of multi-carrier modulation transmitters and multi-carrier modulation receivers in parallel in order to increase the data-carrying capacity of a channel.

5 Figure 10 is a block diagram illustrating a modification of the transmitter of Figure 2A to incorporate trellis coding.

 Figure 11 is a block diagram illustrating a modification of the alternate transmitter of Figure 4 to incorporate trellis coding.

 Figure 12 is a block diagram illustrating a modification of the receiver of Figure 3 to receive a trellis coded signal.

10 Figure 13 is a block diagram illustrating a modification of the receiver of Figure 4 to receive a trellis coded signal.

DETAILED DESCRIPTION OF THE INVENTION

15 Optical communications systems may achieve very high data rates as a result of the high bandwidth of the optical fibers and the availability of high-speed lasers and photo detectors, as well as wideband laser drivers, transimpedance amplifiers, postamplifiers, and clock and data recovery circuits. However there is a demand for ever increasing speed in communications, and technology is rapidly approaching a point where the optical fiber can no longer be treated as having unlimited bandwidth. This is particularly true for the case of multimode fibers, which
20 may exhibit lower data carrying capacity due to the multimode nature of the fiber. Some modern optical communications systems may be limited in their speed by the bandwidth of the optical fibers.

 Bandwidth efficient communications systems have been developed over several decades in the context of narrowband communications, such as voiceband modems and digital subscriber
25 loops. These systems make use of techniques such as multilevel Pulse Amplitude Modulation (PAM) or Quadrature Amplitude Modulation (QAM) to encode several bits per transmitted symbol, thus increasing the effective transmitted data rate without increasing the symbol rate or the required bandwidth of the communication channel. To make the most efficient use possible of the available channel bandwidth, channel equalization techniques may also be used to
30 compensate pulse dispersion and the resulting inter-symbol interference caused by the frequency-dependent attenuation and phase distortion introduced by the channel. Channel coding and coded modulation further increases bandwidth efficiency by allowing the communication system to operate at lower signal to noise ratios. For a fixed amount of noise in the channel, the ability to operate at reduced signal to noise ratios implies that the number of bits encoded in each symbol
35 can be increased, resulting in higher bandwidth efficiency. The use of bandwidth efficient modulation techniques has resulted in practical communication systems that approach the Shannon bound for channel capacity. However so far these bandwidth efficient communications systems have been implemented at relatively low data rates, since they require complex signal

1 processing techniques that are very difficult to implement at high speed.

5 In general bandwidth efficient modulation techniques have not been applied to fiber optic systems. This is so partly because the optical fibers provide so much bandwidth that, in many applications, it is unnecessary to use bandwidth efficient modulation techniques. Additionally,
10 it has been difficult to implement bandwidth efficient modulation techniques at the data rates normally used in optical communications systems. Accordingly many optical communication systems have been based, with a few exceptions, on simple bandwidth inefficient modulation techniques. With the increasing demand for high speed communications systems, however, as the bandwidth demands increase, optical communications are reaching a point where bandwidth
15 efficient modulation techniques will be needed. Thus the problem of how to implement complex digital signal processing (DSP) and coding algorithms at high speed needs to be solved. Furthermore, a highly cost effective way to implement these complex algorithms is in a single monolithic chip or a chip set consisting of a small number of chips, for example in CMOS (Complementary Metal Oxide Semiconductor) technology. In order to reduce cost, it is desirable
20 to reduce as much as possible the complexity of the optical processing, even at the expense of greatly increasing the complexity of the electronic and DSP functions. As an example, it is desirable whenever possible, to replace wavelength division multiplexing (WDM) techniques, which commonly incorporate several laser light sources, by modulation, coding, and signal processing techniques that provide the same data rate over a single optical carrier. By utilizing
25 a single optical carrier the need for optical multiplexers and demultiplexers, as well as the plurality of lasers and photodetectors inherent in WDM techniques may be eliminated.

It is also desirable to replace optical equalization techniques by DSP-based equalization techniques, in order to take advantage of electronic components which are generally less expensive than their optical counterparts. Furthermore, it is desirable to achieve high levels of
30 chip integration, which requires that all analog processing functions, such as amplifiers, mixers, analog filters and data converters be integrated in a single chip or a small chip set. The use of techniques that lend themselves well to VLSI (Very Large Scale Integration), is highly desirable.

Commonly data rates of optical communications systems may exceed the maximum clock speeds of the digital signal processors that can be implemented in current VLSI technologies.
35 Accordingly to process the higher data rates available in optical fibers parallel processing architectures may be employed. In general, parallel processing architectures reduce the required processing speed by partitioning computations into a set of subcomputations. The subcomputations may then be executed in parallel by assigning a separate processor to each subcomputation. Accordingly, the implementation of high-speed algorithms in a transceiver may
40 be accomplished by an array of processors running at reduced clock speed executing tasks in parallel. To exploit the parallelism of an array of processors signal processing algorithms should be of such a nature that they may be partitioned into a number of subcomputations to be executed by the parallel processors present in the array.

1 An important consideration in parallizing the computations is that the computational load
of the different processors be balanced, in order to avoid bottlenecks that may result when one
processor has a significantly increased processing load as compared to the other processors in the
array. Not all signal processing algorithms lend themselves well to a parallel processing-
5 implementation, therefore the choice of modulation, equalization and coding algorithms must be
made with the requirement of parallel processing implementation in mind.

 One aspect of the present disclosure is that it may provide bandwidth efficient modulation
techniques that can be applied to optical communications channels in general. These disclosed
techniques may be found to be particularly advantageous in channels whose bandwidth is limited,
10 for example as a result of the use of multimode fibers.

 A further aspect of the present disclosure is in providing techniques that enable the
implementation of these bandwidth efficient modulation algorithms at high speed and in the form
of a single monolithic chip or a chip set consisting of a small number of chips, for example in
CMOS technology.

15 The present disclosure also describes modulation, equalization, coding, and data
conversion algorithms and architectures that lend themselves well to parallel processing
implementations which may enable the reducing the clock speed of VLSI implementations.
Further useful aspects of this disclosure will become apparent upon reading and understanding
the present specification. Optical channels based on intensity modulation and direct detection
20 are inherently nonlinear. This is because the modulated quantity is the optical power rather than
the electromagnetic field. The principle of superposition applies to the electromagnetic field,
as a result of the linear nature of Maxwell's equations. Superposition does not directly apply to
the optical power. However, it has been shown that under certain very general conditions, the
intensity-modulated optical channel behaves approximately linearly, and the principle of
25 superposition can be applied. This linear approximation of an optical channel is commonly
referred to as the "quasi-linear approximation". The conditions under which the "quasi-linear
approximation" is valid have been analyzed in the article "Baseband Linearity and Equalization
in Fiber Optic Digital Communication Systems", by S.D. Personick, appearing in the Bell System
Technical Journal, Vol.52, No.7, September 1973, pages 1175-1194. Nonlinear distortion may
30 occur in an optical channel when the conditions for the validity of the quasi-linear approximation
do not hold. Furthermore, nonlinearities in the transmitter coupled to the fiber channel (such as
laser or drive electronics non-linearities) may introduce an additional source of nonlinearity even
if the quasi-linear approximation holds.

 In the following discussion we assume that the quasi-linear approximation holds, and treat
35 the optical channel as linear.

 Another impairment that can exist in an optical channel is dispersion. This is a linear
effect. There are different sources of dispersion in optical fibers. One type of dispersion is
chromatic dispersion, caused by the dependence of the index of refraction on the wavelength of

1 the light. If the laser is not perfectly monochromatic (as commonly happens in practice), light
components of different wavelengths travel at different speeds, causing dispersion of the
transmitted pulses. Commonly chromatic dispersion is small and it causes problems only in long
haul optical links. Another type of dispersion is the multimode dispersion, which exists in
5 multimode fibers. The source of this type of dispersion is that different optical fiber modes
propagate at different velocities. A transmitted pulse splits its energy among many different
modes. Since the light pulse carried by each mode travels at different speed, the receiver observes
multiple replicas of the transmitted pulse, arriving at different times, as shown in Figure 1A .

Figure 1A is a graphical illustration showing a light pulse transmitted through a
10 multimode fiber optic channel and the resulting received pulses. Pulse 101 is transmitted.
Because pulse 101 travels through multiple modes in the fiber at different speeds pulses 103, 105,
107, 109 and 111 are received at the receiver. If the fiber attenuation is very small and can be
neglected, the sum of the energies of all the received pulses equals the energy of the transmitted
pulse. In practice, since the fiber has a nonzero attenuation, the sum of the energies of all received
15 pulses will be less than the energy of the transmitted pulse.

As a simplified example, suppose that the transmitted pulse splits its energy equally into only two
modes. Also, suppose that, as a result of the different propagation velocities of the two modes,
these pulses arrive at the receiver with a time separation T , and they suffer zero loss. Then if the
20 energy of the transmitted pulse is 1 (in arbitrary units) the two received pulses have energy 0.5
(in the same arbitrary units). Neglecting the propagation delay of the line, the impulse response
of the fiber is:

$$0.5 \delta(t) + 0.5 \delta(t-T) \quad \text{Equation(1)}$$

25 where $\delta(t)$ is the Dirac delta function. The Fourier transform of this impulse response is the
frequency response of the optical channel, and it is given by:

$$H(\omega) = \exp(-j\omega T/2) \cos(\omega T/2) \quad \text{Equation(2)}$$

30 Figure 1B is a graph of the magnitude of the Equation(2) function. It is clear that this
frequency response exhibits nulls at all odd multiples of $(1/2T)$. This example illustrates how
multimode transmission can give rise to nulls in the frequency response of the fiber. In practice
multimode fiber propagates many modes, typically more than one thousand. This multimode
propagation may result in rather complex impulse and frequency responses. The impulse and
35 frequency responses are also dependent on the way the laser light is coupled to the fiber. If all
modes of the fiber are excited equally, it is said that the channel is operating in "overfilled
launch" conditions. This results in an impulse response that closely approximates a Gaussian

function, as shown in Figure 1C, which is a graph illustrating the response of a multimode fiber channel to an "overfilled launch."

The analytic expression for the impulse response illustrated in figure 1 C is:

$$h(t) = 1 / ((\sqrt{2\pi}) \alpha T) \exp(-t^2/2(\alpha T)^2) \quad \text{Eqn.(3)}$$

Where α is a fiber dependant parameter. The corresponding frequency response is given by:

$$H(f) = \exp(-(2\pi\alpha T f)^2/2) \quad \text{Equation(4)}$$

$H(f)$ is also a Gaussian function, so in the case of overfilled launch conditions, the frequency response does not exhibit nulls. The 3dB optical bandwidth is:

$$B = 0.1874/(\alpha T) \quad \text{Equation(5)}$$

This is called the "overfilled bandwidth" of the multimode fiber. The overfilled bandwidth of a fiber depends on the core diameter and refraction index profile of the fiber as a function of the radius, the fiber length, and the wavelength of the laser, among other things. The bandwidth is inversely proportional to the length of the fiber, so that the product of the bandwidth times length is a constant for a given type of fiber and a given laser wavelength. For example, typical fibers in widespread use today have an overfilled bandwidth of 500MHz • Km at a wavelength of 1310nm, and 160 MHz • Km at a wavelength of 850nm.

A number of alternative launch techniques such as offset launch and vortex launch have been developed in order to excite a reduced number of fiber modes. These techniques could result in increased bandwidth, but the impulse response could also show multiple peaks, as in the example of Figure 1A. This kind of impulse response usually results in a frequency response with nulls similar to the ones shown in Figure 1B, but with a more complicated structure. The exact shape of the frequency and impulse responses is a complicated function of the fiber characteristics and the launch conditions.

Various methods of transferring data over a fiber optic channel are known in the art. Multi-carrier modulation or MCM is one method of communicating over a fiber optic channel. In MCM, multiple carriers at different frequencies are modulated with data. The modulated carriers are then summed and the sum signal is used to modulate a laser, for example, by modulating the intensity of the laser beam.

Multi-carrier modulation systems may also be adapted for use in legacy fiber channels, which may have nulls and noisy frequency bands. Multi-channel modulators, according to embodiments of the present invention may have variable modulations and carrier frequencies.

1 The variable modulations and carrier frequencies of MCM may be selectively chosen in order to
accommodate nulls, noisy frequency bands, and other transmission impediments of existing
and/or low quality channels. Nulls and noisy frequency bands can be determined in an existing
channel, for example, by introducing a test signal and measuring the received result. Multi-
5 channel modulators may also be used, in parallel, in order to upgrade existing fiber channels to
virtually any capacity desired. To upgrade the capacity of existing fiber channels, multiple
MCMs may be added in parallel using multiple lasers having different wavelengths. Because
each laser may have its own response within the channel, each channel may undergo an
initialization, in which a test signal is used to determine the frequency characteristics of the
10 channel at that particular laser wavelength.

Existing fiber channels may be upgraded into any data-carrying capacity desired by
simply adding more MCMs and multiple lasers, having different wavelengths, in parallel until
the desired data-carrying capacity is achieved.

Figure 1D is a block diagram of an exemplary fiber optic data transmission system.
15 Digital data is coupled into a data processing block 101. Data processing block 121 processes
the input data and prepares it for the optical transmitter 123. The optical transmitter 123
transmits the data across a fiber optic channel 125. The optical receiver 107 accepts the data
from the fiber optic channel 125 and then couples it into a data processing module 129. The data
from the optical receiver 107 is processed in the data processing module 129 and then provided
20 to the application, which will receive data.

The blocks within the block diagram of Figure 1D may have a variety of possible
implementations. For example, in a bit serial approach, the data processing block 121 may
accept data and convert the data into a serial bit stream. The optical transmitter 123 may then
accept the serial bit stream from the data processing block 121 and transmit as a serial type on/off
25 keying (OOK) signal. In on/off keying a laser within the optical transmitter block 123 is ideally
turned on and off depending on whether the data that is received from the data processing block
121 is a one or zero.

In practice, the laser is never turned off completely, because the turn-on time of typical
lasers is relatively long, therefore the repeated turn-on transients would degrade the speed of the
30 optical transmission system. Instead the optical power is switched between a high value
(representing a discrete logic level such as a "1") and a low value (representing a discrete logic
level such as a "0"). The ratio of the high to low optical power is commonly called the
"extinction ratio." The laser may also be switched between several intensity levels in order to
represent symbols from a logical alphabet.

35 For the purposes of simplifying this disclosure when two levels of optical power are
transmitted the high and low levels may be referred to as on and off optical pulses, but it should
be understood that an "off" pulse will typically carry a non zero amount of optical power.

In an exemplary fiber optic system according to Figure 1, data is conveyed as a series of

on/off optical pulses from the optical transmitter 123 through the fiber 125 to the optical receiver 127. The optical receiver 127 will then provide the on/off data stream to the data processing module 129. The data processing module will then convert the serial on/off stream to a data output, for example, in a parallel type format.

The blocks in Figure 1D may also be configured in a Wavelength Division Multiplexing (WDM) approach. Wavelength division multiplexing approaches are, in general, divided into dense and coarse WDM, commonly referred to as DWDM and CWDM respectively. The wavelength division multiplexing technique employs multiple optical carriers, which are modulated by a data stream. The dense version of wavelength division multiplexing generally comprises laser carriers whose wavelengths differ by less than one nanometer. Coarse wavelength division multiplexing generally comprises laser carriers whose wavelengths differ by ten nanometers or more. Dense wavelength division multiplexing systems have been created with, for example, up to 100 different wavelengths. Such systems are expensive. A major contributing factor to the expense of wavelength division multiplexing systems is the multiple optical sources for the different wavelengths, which carry the data from the transmitter to the receiver. Additionally the expense of combining the multiple optical carriers, in WDM systems, adds to their cost. Additionally, once the data carriers arrive at the optical receiver 127 they commonly must then be optically split, in order to retrieve the data streams from the individual optical carriers.

It is desirable, from a cost standpoint, to employ a single optical transmitter 123 and a single optic receiver 127 if possible. It is also desirable that the optical transmitter 123 and optical receiver 127 be as simple as possible and any processing accomplished in the electronic data processing blocks 121 and 129. In a preferred embodiment of the present invention, data processing block 121 as well as data processing block 129 comprise a single integrated circuit each. By transferring all functions except those used for the actual optical transmission into, for example, a CMOS (Complementary Metal Oxide Semiconductor) integrated circuit, a low cost implementation of the transmit side of the system in Figure 1 can be realized. Likewise, if the optical receiver 127 is restricted to those components needed for optical reception and all other functions are performed within the data processing block 129, (for example a CMOS integrated circuit), the costs for the received portion of this circuitry of Figure 1 can be minimized. Once such embodiment of a multi-carrier modulation transmitter, which can be integrated into a single CMOS circuit, is illustrated in Figure 2.

Figure 2A is a block diagram of a multi-carrier modulation transmitter. The illustrative MCM transmitter of Figure 2A has a capacity of 10 gigabits/second. In Figure 2, 64 bits of data 201 are coupled into a XGMII (Ten Gigabit Media Independent Interface) module 203. The XGMII is shown as providing a 64 bit input or output at a clock rate of 156.25 MHz. In reality the XGMII interface operates on 32 bits at a time, and is clocked on both the rising and the falling edges of the 156.25 MHz clock. A complete description of the XGMII interface is given in the

1 presentation "10 Gig MII Update" by H. Frazier, presented at the IEEE 802.3 High Speed Study Group Plenary meeting in Kauai, HI, on November 9, 1999. A copy of this presentation can be obtained from the IEEE 802.3 web site, at:

5 http://grouper.ieee.org/groups/802/3/10G_study/public/nov99/frazier_1_1199.pdf.

Other system interfaces besides the XGMII have been under consideration by the IEEE802.3ae Task Force, and will likely be included in the standard. One important alternative interface is the XAUI interface, described in the document:

10 http://grouper.ieee.org/groups/802/3/ae/public/may00/taborek_2_0500.pdf

Those skilled in the art will recognize that the interfaces illustrated within this disclosure are by way of example and are chosen as examples likely to be familiar to those skilled in the art. Other interfaces may also be used. The uses of the exemplary interfaces within this disclosure are in no way meant to limit the inventive concepts to those interfaces and serve the purpose of
15 illustration and example only.

The 64 bits are then divided into four bit nibbles and further provided to the modulators. Modulator zero, 205 is a QAM-16 (Quadrature Amplitude Modulation) module. The QAM-16 module 205 accepts four bits of data from the XGMII module 203. The frequency that is mixed
20 with the output of the QAM-16 modulator in mixer 207 is zero megahertz. After the mixing stage 207, the signal is bandpass filtered in block 209 to remove any undesirable components. The filtered signal is then coupled into a combiner 211. Similarly, the second four bits from the module 203 are coupled into QAM modulator 213. The output of the QAM-16 modulator 213
25 is coupled into a mixer 215 where it is mixed with a 200 megahertz signal. The resultant signal is then bandpass filtered, in bandpass filter 217, and coupled into the combiner 211. The signals which are coupled into the combiner 211 from bandpass filter 217, occupies a frequency bandwidth from 200 megahertz to 356.25 megahertz. Each mixer within the exemplary multi-carrier modulation block diagram illustrated in Figure 2 has a frequency which is separated from
30 successive mixer frequency by 200 megahertz. In such a way by having the bandpass less than the separation of mixing frequencies may minimize the crosstalk between the modulators.

In the final stage, four bits are coupled from the XGMII modulator 203 into the final
35 QAM-16 modulator 219. The frequency of modulation, which is coupled into mixer 221, is 3.0 gigahertz. The output of mixer 221 is then coupled into bandpass filter 223 to remove any unwanted components. The filtered signal is then coupled from the bandpass filter 223 into the combiner 211. The combiner 211 combines all the modulated frequency bands into a single

1 frequency spectrum. The frequency spectrum signal is then further coupled to laser drive
electronics 213. The output of the laser drive electronics 213, is an intensity modulated signal
corresponding to the combination of all 16 modulators. All of the electronics illustrated in
5 Figure 2 and encompassed within the dotted line 225 may be integrated into a single integrated
circuit, for example a CMOS integrated circuit chip. By integrating all the electronics within the
block 225 on a single chip, the system cost may be reduced. By placing as much of the
processing as possible within the integrated circuit 225, costs of assembly, alignment and
multiple optical parts may be greatly reduced.

10 Figure 2B is a block diagram of a digital implementation of a QAM-16 modulator, such
as illustrated in figure 2A. The QAM 16 Mapping block 229 accepts a four bit input signal at
a frequency of 156.25 MHz. The QAM 16 Mapping block 229 then maps the four input bits into
I (inphase) and Q (quadrature) representations of the input bits received. The I and Q values are
15 then provided to Square Root Raised Cosine Filters 231 and 233 respectively. The sampling
frequency f_s of Square Root Raised Cosine Filters 231 and 233 is typically three times the symbol
rate or higher (in the present example 468.75 Mhz or higher). Because of the DSP based
implementation, the carrier frequency $\omega_0 = 2\pi f_0$ must be limited to a relatively low value such as
20 100Mhz. Higher carrier frequencies would require an increase in the sampling frequency f_s of
the square root raised cosine filters and D/A Converters making the implementation difficult.
The signals are then multiplied in blocks 235 and 237 and summed in block 239. The summed
value is then coupled into a Digital to Analog converter 241, and then further into a smoothing
25 filter prior to the coupling of the signal to the mixer (e.g. 207).

Figure 2C is a block diagram of an analog implementation of a QAM-16 modulator, such
as illustrated in figure 2A. The QAM 16 Mapping block 229 accepts a four bit input signal at
a frequency of 156.25 MHz. The QAM 16 Mapping block 229 then maps the four input bits into
30 I (inphase) and Q (quadrature) representations of the input bits received. The I and Q values are
then provided to Square Root Raised Cosine Filters 231 and 233 respectively. The outputs of the
Square Root Raised Cosine Filters 231 and 233 are then coupled into D/A converters 245 and
247, then further provided to smoothing filters 249 and 251, prior to being mixed in mixers 253
and 255, and then further combined in 257. In this approach the modulation can be done at the
35 carrier frequency directly f_c directly, avoiding the need of the mixer and bandpass filter.
However, this approach requires that the amplitude and phase of the I and Q carriers $\cos(\omega t)$ and
 $\sin(\omega t)$ be very accurate.

Figure 3 is a block diagram of a MCM receiver. The signal from the laser drive electronics 213 is provided to a laser, for example a solid state laser. The output of the laser is coupled to a fiber optic channel. The output of the fiber optic channel is provided to a photo detector and amplifier 301. The photo detector and amplifier 301 converts the optical signal into a voltage level. The photo detector and amplifier 301 then couples the amplitude modulated signal into a series of mixers. The output of the photo detector and amplifier 301 corresponds to the output of the combining circuit 211. The first mixer 303 mixes the incoming signal with zero megahertz. In other words, the signal is basically coupled into a low pass filter 305. A mixer 303 is illustrated even though no mixing is occurring because, in other embodiments of the MCM system, a first mixer, such as 303, may provide a programmable mixing function. Low pass filter 305 filters the incoming signal and provides a baseband frequency signal to a QAM-16 demodulator 307. The QAM-16 demodulator demodulates the baseband signal provided to it by the low pass filter 305. The output of the QAM 16 demodulator is a four bit data signal which is then provided to the XGMII 309. Similarly, the second mixer 313 accepts the amplitude modulated signal from the photo detector and amplifier 301. The signal is then mixed with a 200 megahertz mixer signal which translates a portion of the signal bandpass, corresponding to 200 to 400 megahertz, into a baseband signal. The baseband signal is filtered in the low pass filter 315 thereby eliminating other unwanted, non-baseband signals. The output of the low pass filter is then coupled into a QAM-16 demodulator 317. The output of the QAM-16 demodulator 317 is a four bit symbol which is coupled into the XGMII 309.

Additional mixers (e.g. 303 and 313) are provided with mixing signals separated by 200 megahertz. The 16th mixer 319 accepts the bandpass signal from the photo detector and amplifier 301, and mixes it with a three gigahertz signal. The output of the mixer 319 is then coupled into a low pass filter 321. The low pass filter 321 passes the resulting baseband signal and provides it to the QAM-16 demodulator 322. The QAM-16 demodulator demodulates the signal into a four bit data signal. The four bit symbol is then coupled into the XGMII (Ten Gigabit Media Independent Interface) unit 309. The XGMII combines all 16 input symbols provided to it to produce a stream 311 64 bits wide.

Figure 4 is a block diagram of an alternative implementation of a multi-carrier transmitter. In Figure 4, a 64 bit wide digital signal 401 is coupled into a XGMII 403. The XGMII interface separates the bits into four bit groups. Each four bit group is coupled into an assembling coder, for example, 405, 415 or 419. The output of each symbol encoder is then coupled into an inverse

1 fast Fourier transform block 407. Digital to analog converters for example, 409, 417 and 421
convert the output of the inverse fast Fourier transform (IFFT) block 407 into analog samples.
The analog samples are then coupled into an analog multiplexer 411 with a sampling frequency
5 of five gigahertz. The analog multiplexer multiplexes all analog signals into a single waveform
comprising successive samples. The analog waveform is then coupled into laser drive electronics
413 and is used to modulate the laser intensity using drive electronics 413. The implementation
illustrated in Figure 4 may be integrated into one integrated circuit device 423 capable of
10 accepting a 64 bit wide digital bit stream. In the present embodiment, the 64 bit wide digital
signal stream has a frequency of 156.25 megahertz resulting in an overall data carrying capacity
of 10 gigabits per second. The laser drive electronics 413 intensity modulates the laser beam,
which is then coupled into a fiber optic channel. The other end of the fiber optic channel is then
coupled into the photo detector and amplifier 501 of the receiver module, for example, as
15 illustrated in Figure 5.

Figure 5 is a block diagram of an alternate implementation of multi-carrier modulation
receiver, corresponding to the alternative implementation of multi-carrier modulation transmitter
illustrated in Figure 4. The photo detector and amplifier 501 receive the multi-carrier modulated
20 signal from the fiber optic and convert it into an electrical signal. The resulting electrical signal
from photo detector and amplifier 501 is coupled into an array of sample and hold circuits, for
example sample and holds 503, 515 and 521. The sample and hold circuit samples successive
values in the input waveform. The output of the sample and hold circuits are then coupled into
25 analog to digital converters such as for example 505, 517 and 523. The digital outputs from the
analog to digital converters are further coupled into a fast Fourier transform module 507. The
sequence of symbols which comprise the output of the fast Fourier transform block 507 are
coupled into symbol decoders, for example, 509, 519 and 525. The output of each symbol
30 decoder is a set of four data bits. The set, of four bits from each symbol decoder is coupled into
the XGMII interface 511. The XGMII interface 511 receives the four bit input from the symbol
decoders and forms a 64 bit parallel output. The 64 bit parallel output from the XGMII 511 is
clocked out at a frequency of 156.25 megahertz. The output of the XGMII therefore represents
35 a 10 gigabit per second digital data stream. The entire receiver represented by the block 525 can
be integrated within a single integrated circuit, such as a CMOS integrated circuit.

The transmission techniques illustrated in Figures 2, 3, 4 and 5 can provide for 10 gigabits
per second data transmission at a symbol rate of 156.25 megahertz by utilizing the intrinsic

1 parallelism present in the sub-carrier multiplexing technique.

5 If a non-parallel method were used to transmit 10 gigabits per second at a symbol rate of 156.25 megahertz, 64 bits per symbol would be required to achieve the 10 gigabit per second data rate. This would result in a modulation constellation of astronomical complexity and low noise immunity. Even if the symbol rate was quadrupled to 625 megahertz, a 65,536 QAM constellation would be required. In addition, because the 156.25 megahertz rate is relatively low, multi-carrier modulation is robust and multi-path propagation effects, such as multi-mode dispersion in fibers, is minimized due to the low transmission frequency. Those skilled in the art will recognize that the multi-carrier modulation technique just described is exemplary. Many variations of individual bandpasses, modulation constellations and carrier frequencies are possible within the scope of the inventive concepts of this disclosure.

10 The multi-carrier modulation concepts illustrated in Figures 2, 3, 4, and 5 may also be used to increase the data rate within current deployed fiber networks. A difficulty that may be encountered with current fiber networks is that some of the fibers used in current fiber channels may be of lesser quality.

15 Figure 10 shows a modification of the transmitter of Figure 2A that incorporates trellis coding. The 4-bit input from the XGMII block is passed to a rate 5/4 convolutional coder. The 5-bit output from the convolutional coder is modulated using a QAM-32 modulator. Trellis coding requires an expanded constellation, but does not increase the symbol rate of the QAM modulator or the bandwidth of the modulated signal. The same idea can be applied to the alternative transmitter implementation of Figure 4. This is shown in Figure 11. The modified receivers incorporating trellis decoders for the implementations of Figure 3 and 5 are shown in Figures 12 and 13 respectively. The use of trellis coding results in increased robustness and decreased error rate in the presence of noise and other channel impairments. While Figures 10 through 13 show particular embodiments of trellis coding and decoding for an optical communications transceiver, it will be clear to anyone skilled in the art that many alternative embodiments are possible without departing from the spirit and scope of the present invention.

20 Those fiber channels may exhibit channel anomalies such as deep nulls, particularly in the case of fibers with multi-mode dispersion. Such nulls are illustrated in Figure 6.

25 Figure 6 is a graph of intensity versus frequency representing the transfer function of an exemplary fiber optic system. The ideal response is linear, that is the transmitted intensity does not vary as the laser light output is modulated at different frequencies. However fiber optic

1 systems, particularly those exhibiting multi-mode interference, may exhibit nulls such as 603 and
605. The nulls 603 and 605 may be due in part to a large number of different factors such as
multi-mode dispersion within the fiber, imperfect coupling of the fiber to the light source,
5 frequency response of driver electronics and a variety of other factors.

Figure 7A is a block diagram of a circuit implementation, as may be used with fiber
channels exhibiting nulls, noise and/or frequency roll off. In Figure 7, a parallel bit stream 701
comprising bits 0 through 63 is coupled into a XGMII interface. The XGMII interface is
controlled by a micro controller 727 through a controlling bus 729, such as an I²C bus. The
10 control bus 729 controls the XGMII controller so that the number of bits which are provided to
each modulator such as 705, 713 and 719, are variable. Additionally, the micro controller 727
using the control bus 729 may control the modulation constellations of the modulators within the
system. The control bus may also control the modulation frequencies such as 731, 733 and 735
15 which are applied to mixer 707, 715 and 721, respectively. The micro controller 727 may also
control the bandpass filters such as 709, 717 and 723. The micro controller 727 may control the
system variables so that the mapping of data from the input 701 through the modulators and
frequency bands avoids fiber channel anomalies such as nulls within the optic system, for
20 example the nulls illustrated at 603 and 605 of Figure 6.

In order to configure the circuit 225 to avoid nulls and to match the noise response of the
channel the configuration of the transmitter can be arranged to match the transfer characteristics
of the fiber channel. To arrange the configuration of the transmitter the transfer characteristics
25 of, the fiber channel characteristics need to be determined. Such a process to determine the
frequency response of the fiber channel is illustrated in Figure 7B.

Figure 7B is a flow diagram illustrating the process by which the transfer characteristics
of a fiber channel may be mapped. The process begins in block number 741 when the transmitter
and receiver are coupled to a fiber channel. In block 743, the transmitter then transmits an
30 intensity modulated signal, preferably having a flat frequency characteristic, in which the
frequency of intensity is swept from the minimum frequency, to be used on the channel, to the
maximum frequency, to be used on the channel. In block 745, the receiver receives the signal
and measures intensity versus frequency. This measurement of intensity versus frequency
35 between the frequencies of F_{\min} and F_{\max} will characterize the frequency transfer characteristic of
the fiber channel. The measurements of intensity versus frequency are then communicated from
the receiver to the transmitter. In block 747 the transmitter maps the fiber channel response onto

the circuitry of the transmitter. The process then ends in block 749.

As an illustration of configuring the transmitter according to the fiber channel response, Figure 2A is compared with Figure 7A. In Figure 2, for example, modulator 213 receives a four bit value. Modulator 213 utilizes a QAM-16 modulator. The carrier frequency is 100 megahertz and the bit rate is 156.25 megahertz. The bandpass filter 217 is then set to a value of 0 to 200 megahertz. The other modulators and bandpass filters could be similarly set according to channel characteristics.

If for instance one half of the 200 megahertz baseband frequency of the bandpass filter 217 corresponded to a null within the fiber optic channel, the null could be compensated for (as shown in Figure 7A) by reducing the symbol rate of modulator 713. Modulator 713 would then only accept 2 bits of data from the XGMII interface 703 at a time. The micro controller 727 could program the XGMII 703 to couple only 2 bits at a time into modulator 713. If on the other hand, the particular band corresponding to modulation frequency two were exceptionally free of noise, the XGMII could be controlled by the micro controller 727 to couple five bits into modulator 713 and QAM-32 could be used within modulator 213. Similarly, the bandwidths of the carriers could be adjusted to be wider or narrower and carry more or less information depending on the characteristics of the fiber channel. The mapping, of course, would have to be communicated either explicitly or implicitly to the receiver in order for the data stream communicated to be properly decoded. Figure 8 is an example of a multi-carrier modulation receiver that may be used with the transmitter illustrated in Figure 7A.

Figure 8 is a block diagram of a receiver as may be used with the transmitter illustrated in Figure 7A. In Figure 8 the photo detector and amplifier 801 receives a signal from the fiber channel. The receiver 825 has been configured to match the transmitter 725 in Figure 7A. The receiver in Figure 8 may be configured in a variety of ways. The receiver illustrated in Figure 8 may be configured explicitly by receiving a mapping of the channel transfer characteristic from the transmitter. The receiver in Figure 8 may be also mapped implicitly by having the same mapping algorithm within the micro controller 827 as within the micro controller 727. Because the mapping of the frequency characteristics of the fiber channel is accomplished by sending a signal from the transmitter to the receiver and the receiver sending the characteristics of the fiber channel to the transmitter, the receiver already knows the characteristics of the fiber channel because of the signal received from the transmitter. If the same algorithm for mapping modulation, mixer frequencies and bandpass filter widths are used within the receiver as within

1 the transmitter the configuration of the transmitter need not be expressly communicated to the
receiver only the overall response of the channel need be communicated. For example, after the
frequency response of the channel dictated that 2 bits would be coupled into modulate 713 at a
5 time, the same algorithm within micro controller 827 would configure demodulator two block
number 817 as an 8PSK demodulator. Alternately, the configuration from the transmitter circuit
may be communicated to the receiver circuit explicitly on start up. By using the transmitter in
Figure 7A, mapping the fiber channel and communicating the mapping to similarly configure a
10 receiver as illustrated in Figure 8, the capacity of any existing fiber channel, no matter the
characteristic, can be accommodated. Additionally, the system illustrated in Figure 7A and Figure
8 may be extended through the use of multiple wavelength lasers and parallel MCM transmitter
receiver pairs. For example, an existing fiber can have two laser beams coupled through it to
15 communicate between a sending end and a receiving end. Such a system is illustrated in Figure
9.

Figure 9 is a block diagram illustrating the use of a set of three multi-carrier modulation
transmitters and three corresponding multi-carrier modulation receivers used in parallel in order
to increase the data carrying capacity of the illustrated fiber channel. In Figure 9, three multi-
20 carrier modulation transmitters 725A, 725B and 725C are employed in order to intensity
modulate the beams of three lasers 903, 905 and 907. The embodiment of Figure 9 is by way of
illustration and example only. The number of multi-carrier modulation transmitters, lasers and
receivers that are used may vary from embodiment to embodiment depending on the capacity
25 desired and the transfer characteristics of the fiber channel 911 carrying the data. In Figure 9,
data is input serially to a splitter 901. Splitter 901 splits the data so that three separate streams
of data are coupled into three multi-carrier modulation transmitter modules 725A, 725B and
725C. The multi-carrier modulation transmitter modules 725A, 725B and 725C may be identical
30 modules. In a preferred embodiment, each module is implemented as a single integrated circuit
chip, for example, a CMOS integrated circuit chip. The multi-carrier modulation transmitters
are further coupled into laser drive electronics 713A, 713B, and 713C, respectively. Laser drive
electronic 713A drives laser 903, laser drive electronic 713B drives laser 905, and laser drive
35 electronic 713C drives laser 907. The outputs of lasers 903, 905 and 907 are combined optically
in a combiner 909 which also couples the combined optical beams into a fiber optic channel 911.
The fiber optic channel 911 carries the three laser beams to a receiver and beam splitter 913.
The receiver and beam splitter 913 splits the output from the fiber optic channel 911 back into

1 its constituent laser carriers. The three laser carriers are then coupled into photo detectors and
amplifiers 801A, 801B, and 801C. The photo detectors and amplifiers convert the light signal
into an electrical signal which is then further coupled into multi-carrier modulation receivers
5 825A, 825B and 825C. Multi-carrier modules 825A, 825B and 825C may be identical and may
operate in parallel without needing to be aware of the operation each other. The output of the
multi-carrier modulation receivers are then combined in combiner block 915A and produce an
output data stream. Multi-carrier modulation transmitters, lasers and multi-carrier modulation
10 receivers can be added as needed in order to achieve the capacity desired.

For example, if the fiber optic channel 911 is an existing fiber optic channel for a local
area network and it is desired to upgrade it to service a 10 gigabit ETHERNET network,
transmitters, lasers and receivers may be added in parallel until the 10 gigabit capacity is
15 achieved. The multi-carrier modulation transmitters and receiver pairs may cooperate to
characterize the fiber optic channel at each laser wavelength used. By combining multiple multi-
carrier modulation transmitters, as illustrated at 917, and multi-carrier modulation receivers as
illustrated at 919, a very efficient architecture for implementing high speed data rate
communications utilizing existence fibers can be accomplished. For example, by combining the
20 data splitter 901 with a plurality of multi-carrier modulation transceivers 725, as illustrated at
917, a number of lasers can be accommodated. Likewise, a number of receivers 825 and a data
combiner 915 can be combined in a single integrated circuits 919. These circuits can then be
coupled to laser drive electronics and laser receiving electronics as needed in order to achieve any
25 capacity desired. Accordingly, existing fiber optic channels 911 can be upgraded at reasonable
costs without having to replace existing fiber channels. The receivers and transmitters can adjust
to the characteristics of the fiber channel and high speed networks, for example, 10 gigabit
communication networks, can be implemented despite the fact even in fiber channels of inferior
30 quality.

Even if fiber channels have grossly inferior transfer characteristics the channel may be
upgraded to a high data rate by adding as many of the configurable multi-carrier modulation
receivers in parallel as necessary to achieve the desired data rates and noise immunities.

35 Figure 10 is a block diagram illustrating a modification of the transmitter of Figure 2A
to incorporate trellis coding.

Exemplarily a 4-bit input from the XGMII block 1003 is passed to a rate 5/4
convolutional coder 1005. The 5-bit output from the convolutional coder is modulated using a

1 QAM-32 modulator 1021 prior to being coupled to a mixer 1017. The mixer 1017 then couples
the mixed signal to a bandpass filter 1021, which filters out unwanted components and further
provides the filtered signal to a combiner circuit 1027. The combiner circuit 1027 combines all
5 the bandpass signals provided to it by the plurality of bandpass filters and then provides the
combined signal to the laser drive electronics 1027.

Trellis coding requires an expanded constellation, but does not increase the symbol rate
of the QAM modulator or the bandwidth of the modulated signal, accordingly in the present
exemplary embodiment a QAM 32 modulator is used to accommodate a 5 bit input. Other
10 modulators may be used depending on implementation requirements. The convolutional coder
provides a trellis encoding that enhances the robustness of the code and reduces such problems
as inter-symbol interference.

Figure 11 is a block diagram illustrating a modification of the alternate transmitter of
15 Figure 4 to incorporate trellis coding. In figure 11 a 5/4 convolutional coder accepts a 4 bit input
and provides a 5 bit output. The addition of a convolutional encoder provides redundancy in the
code and provides a mechanism for reducing problems such as inter-symbol interference.

Figure 12 is a block diagram illustrating a modification of the receiver of Figure 3 to
20 receive a trellis coded signal. In figure 12 a QAM 32 demodulator 1215 is disposed between the
low pass filter (for example 1209) and the XGMII 1227. The QAM 32 demodulator 1215
produces soft decisions for the purpose of providing them to a trellis decoder 1221. The
demodulator 12 has been chosen as a QAM 32 demodulator in order to match the input signal.
25 Other demodulators may be used corresponding to the modulation of the transmit signal.

Figure 13 is a block diagram illustrating a modification of the receiver of Figure 4 to
receive a trellis coded signal. In figure 13 the 32 Inverse Fourier Transform provides symbols
(S) along with the complex conjugate of the signals (S^*) to a trellis decoder. The trellis decoder
30 decodes the symbols and then provides a 4 bit output signal to the XGMII to combine with other
signals in order to produce the output signal.

The use of trellis coding results in increased robustness and decreased error rate in the
presence of noise and other channel impairments. While Figures 10 through 13 show particular
35 embodiments of trellis coding and decoding for an optical communications transceiver, it will
be clear to anyone skilled in the art that many alternative embodiments are possible without
departing from the spirit and scope of the present invention. For example the convolutional
coders may be changed, the modulators may utilize other modulation constellations and

1 modulation frequencies, and the modulators, encoders, bandpass filters, demodulators, also may
be changed for example to accommodate the characteristics of the fiber channel.

5

10

15

20

25

30

35

1 WHAT IS CLAIMED IS:

1. An apparatus for transmitting data on a fiber channel, the apparatus comprising:
an input that receives a digital signal to be transmitted;
5 a plurality of programmable modulators each configured to accept a portion of the digital signal to be transmitted, and to modulate the portion of the digital signal accepted;
a plurality of mixers, each mixer coupled to the output of one of the programmable modulators to accept a modulated signal and mix it with a mixer frequency;
10 a plurality of bandpass filters, that filter the output of the mixers; and
a summation unit that combines the output of the mixers into a single signal.

2. An apparatus as in claim 1 wherein the input that receives a digital signal to be transmitted comprises a Gigabit Media Independent Interface (GMII).
15

3. An apparatus as in claim 1 wherein the input that receives a digital signal to be transmitted further comprises a control input that controls the number of bits of the digital signal to be transmitted which are provided to each modulator.
20

4. An apparatus as in claim 1 wherein each programmable modulator further comprises a control input that controls the type of modulation that is applied to the portion of the digital signal that is accepted by each modulation.
25

5. An apparatus as in claim 4 wherein the type of modulation selected consists essentially of binary phase shift keying (BPSK), quadrature phase shift keying (QPSK), and quadrature amplitude modulation (QAM).
30

6. An apparatus as in claim 1 wherein the mixer frequency that is provided to the mixer is a programmable frequency.

7. An apparatus as in claim 1 wherein each bandpass filter has a programmable bandpass.
35

1 8. An apparatus as in claim 1 wherein the apparatus is integrated within a single integrated circuit.

5 9. An apparatus as in claim 8 wherein the single integrated circuit is a complementary Metal Oxide Semiconductor (CMOS) integrated circuit.

10 10. An apparatus for receiving data from a fiber channel the apparatus comprising:
an input that receives a wide band signal;
a plurality of mixers that accept the wideband signal and mix it with a mixer frequency;
a plurality of low pass filters that filter the outputs of the mixers;
a plurality of programmable demodulators each accepting the output of one of the
15 mixers and demodulating said mixer output thereby providing a demodulated digital output; and
a combiner circuit for combining the demodulated digital outputs from the plurality of programmable demodulators into at least one digital data stream.

20 11. An apparatus as in claim 10 wherein the mixer frequency is a programmable frequency.

25 12. An apparatus as in claim 10 wherein the plurality of low pass filters have programmable bandwidth.

30 13. An apparatus as in claim 10 wherein the programmable demodulators further comprise a control input that controls the type of demodulation applied to the signal accepted from the mixer.

35 14. An apparatus as in claim 13 wherein the type of modulation selected consists essentially of BPSK, QPSK, and QAM.

15. An apparatus as in claim 10 wherein the combiner circuit comprises a XGMII.

- 1 16. A method for transmitting data on a fiber optic channel, the method comprising:
 providing a test signal to a fiber optic channel;
 receiving a characterization of the channel defined by the channel response to the
5 test signal;
 programming a multicarrier modulator corresponding to the characterization of
the channel.
- 10 17. A method as in claim 16 wherein providing a test signal to a fiber optic channel
further comprises providing an intensity modulated light source wherein the intensity changes
according to a frequency sweep signal, but the maximum and minimum intensity does not
change.
- 15 18. A method as in claim 16 wherein programming a multicarrier modulator further
comprises selecting a type of modulation for a plurality of modulators, wherein each modulator
corresponds to a modulation of one of a multicarrier signals.
- 20 19. A method as in claim 16 wherein programming a multicarrier modulator further
comprises providing a plurality of selected mixer frequencies to a plurality of mixers, wherein
the mixers determine the carrier frequencies for the multicarrier modulator.
- 25 20. A method as in claim 19 further comprising programming a bandpass filter with
a center frequency corresponding to the mixer frequency of the mixer which provides a signal
to the bandpass filter.
- 30 21. A method as in claim 20 further comprising selecting the bandwidth of a plurality
of bandpass filter depending on the modulation of the signal being filtered by each bandpass
filter.
- 35 22. An apparatus as in claim 1 further comprising a plurality of convolutional coders
disposed between the input and at least one of the plurality of programmable modulators and
accepting a portion of the signal to be transmitted from the input and performing a convolutional

1 coding on the accepted signal thereby providing a convolutionally coded output to the at least at least one of the plurality of programmable modulators.

5 23. An apparatus as in claim 10 further comprising:
at least one demodulator providing soft decisions as an output;
at least one trellis decoder that accepts soft decisions from the at least one demodulator
and provides a trellis decoding of the soft outputs and provides a hard decision to the combiner
10 output.

24. An apparatus for transmitting data on a fiber channel the apparatus comprising:
15 an input that receives a digital signal to be transmitted;
a convolutional coder disposed between the input and at least one symbol encoder;
a plurality of symbol encoders that accept a portion of the signal received by the input,
and encode the input into a symbol (S) and a complex conjugate of the symbol (S*);
20 a 32-inverse fast Fourier Transformer (32-IFFT) that receives S and S* signals and
provides a digital output signals;
a plurality of D/A converters for accepting the digital outputs from the 32-IFFT and for
25 converting the accepted digital value to an analog value; and
an analog multiplexer that samples the analog outputs from the plurality of digital to
analog converters and combines them into an interleaved signal having successive values
representative of the output of the plurality of digital to analog converters.
30

25. An apparatus for receiving data on a fiber channel the apparatus comprising:
an input that accepts an interleaved signal comprising a plurality of discrete successive
35 values;
a plurality of sample and hold circuits that accept the interleaved signal and extract a
sample comprising a discrete value;

1 a plurality of analog to digital converters that convert the discrete values from the plurality of sample and hold circuits to a plurality of digital values;

5 a 32 Inverse Fourier Transform circuit that accepts said plurality of values from the plurality of analog to digital converters and converts said values into symbols (S) and complex conjugates of the symbols (S*);

10 A plurality of trellis decoders that accept said symbols (S) and said complex conjugates of the symbols (S*) and produced an uncoded output; and

an interface which accepts the outputs of said plurality of trellis decoders and combines them into a digital signal.



15


20

25


30

35

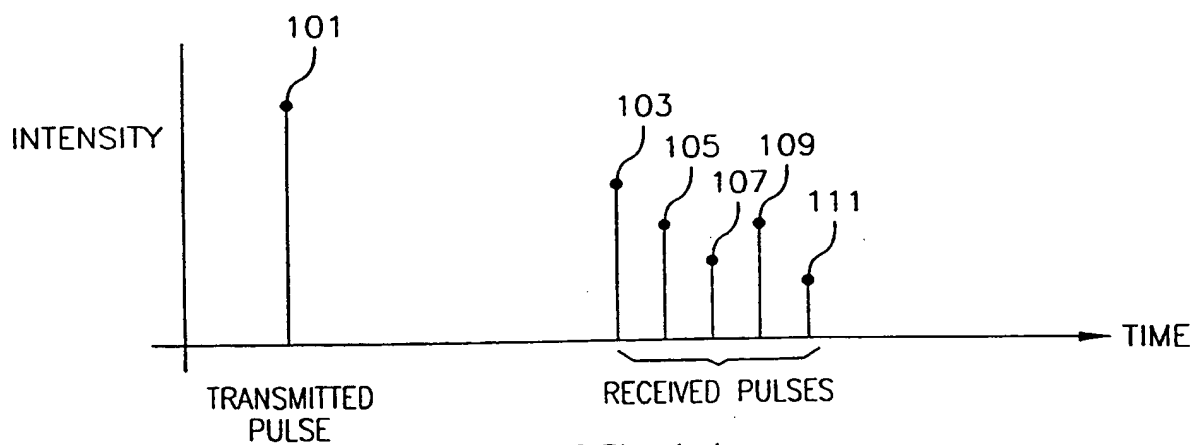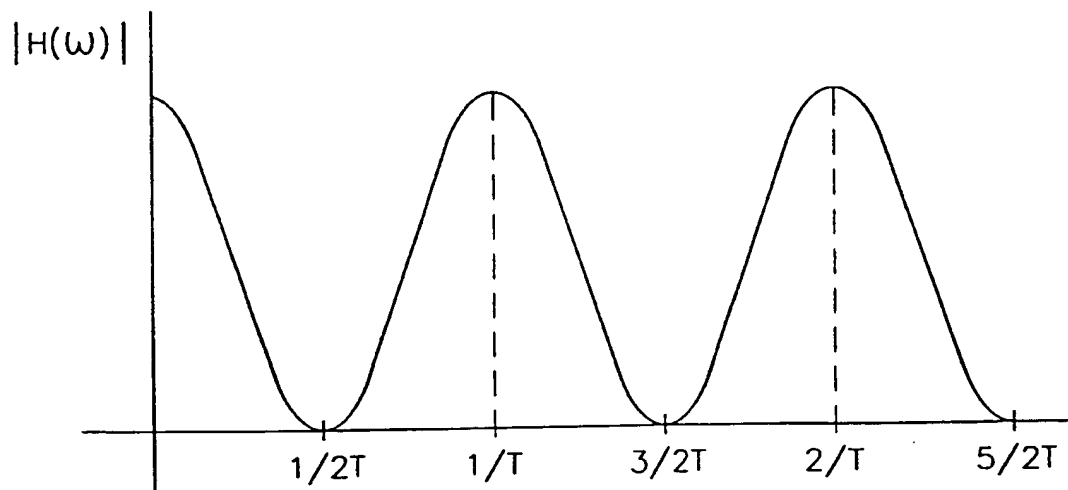*FIG. 1A**FIG. 1B*

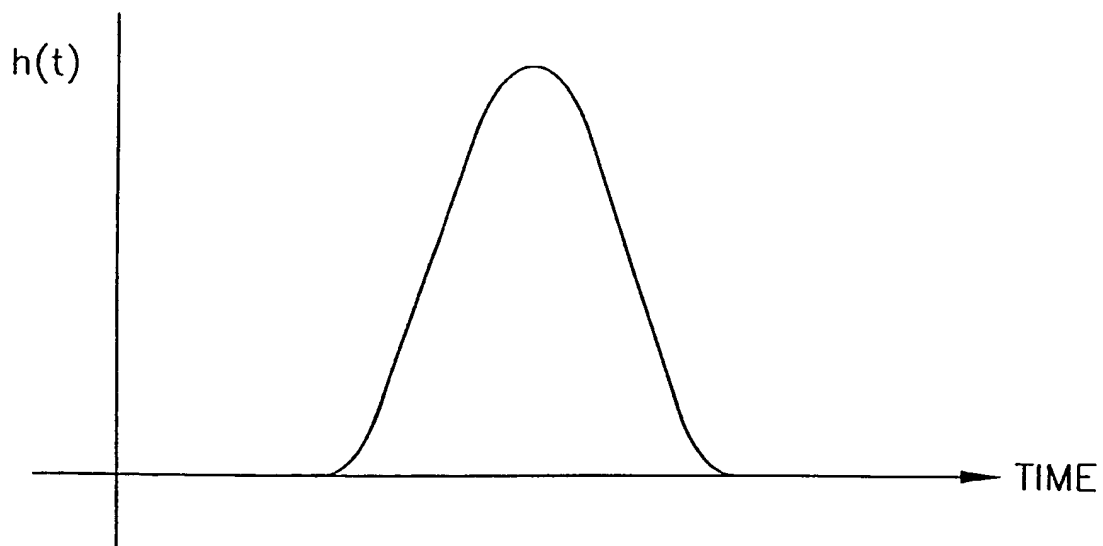*FIG. 1C*

3/18

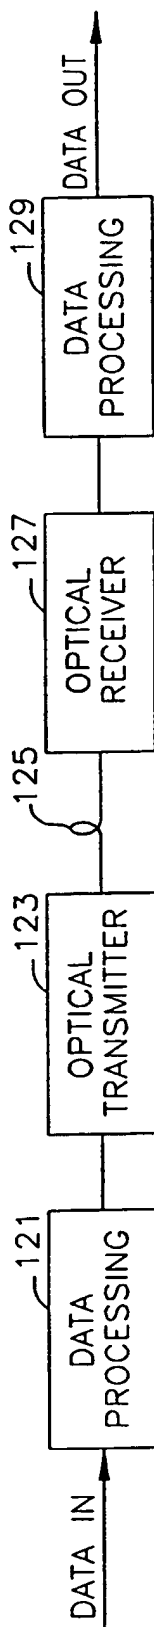*FIG. 1D*



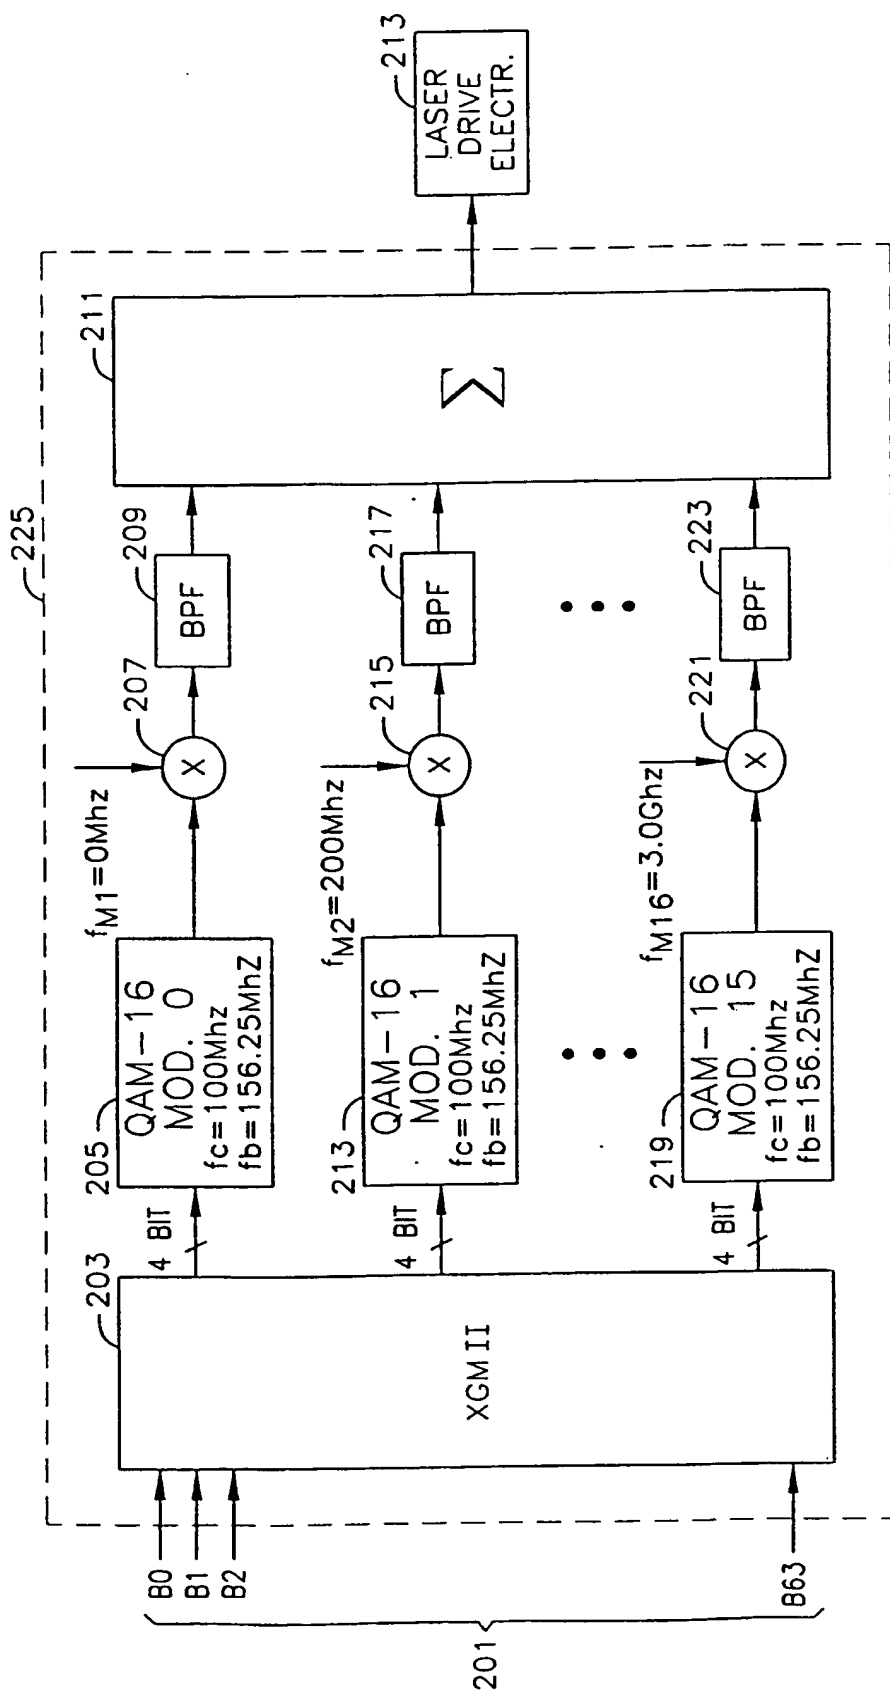


FIG. 2A

FIG. 2B

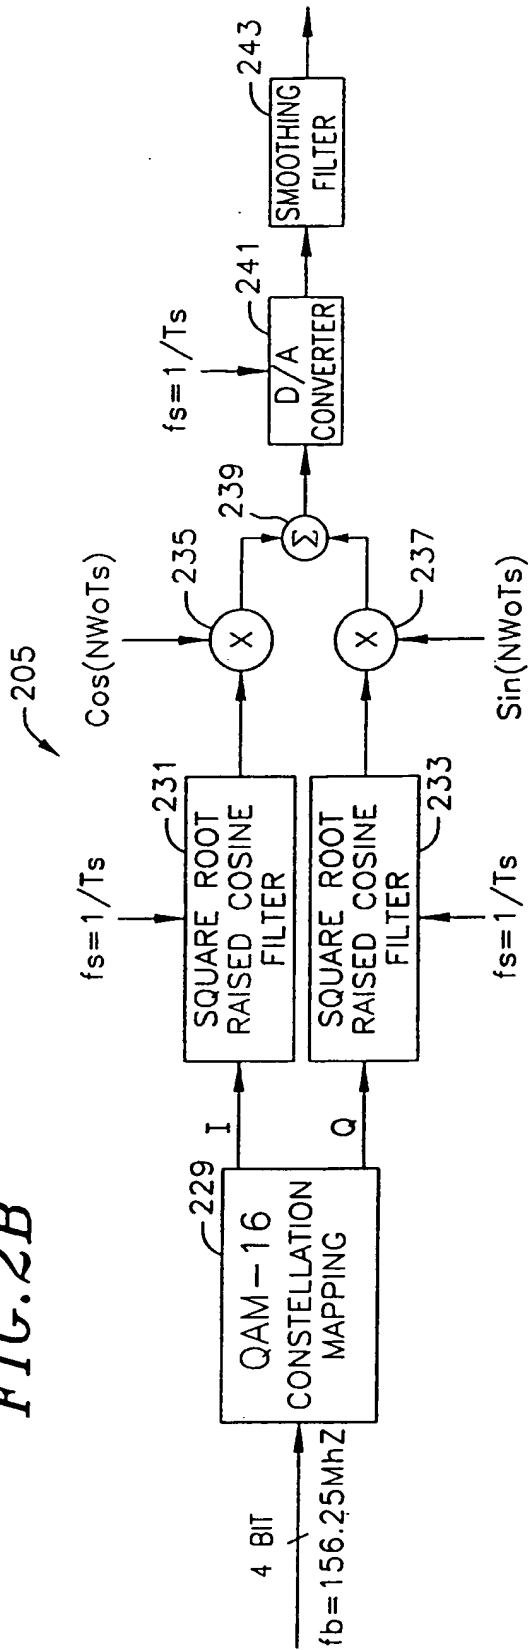

$T_s = \text{SAMPLING PERIOD}$
 $\omega_n = 2\pi f_s = \text{DIGITAL CARRIER ANGULAR FREQUENCIES}$

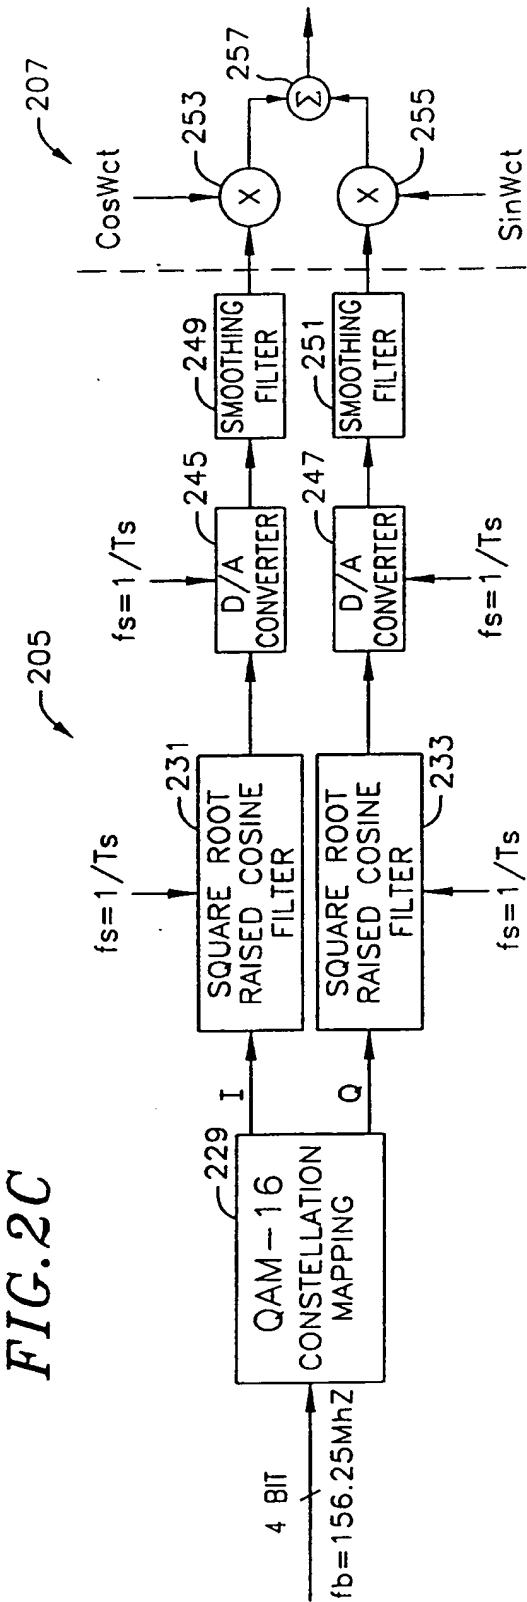

$T_s = \text{SAMPLING PERIOD FOR DSP BLOCKS}$
 $\omega_n = 2\pi f_s = \text{DIGITAL CARRIER ANGULAR FREQUENCIES}$

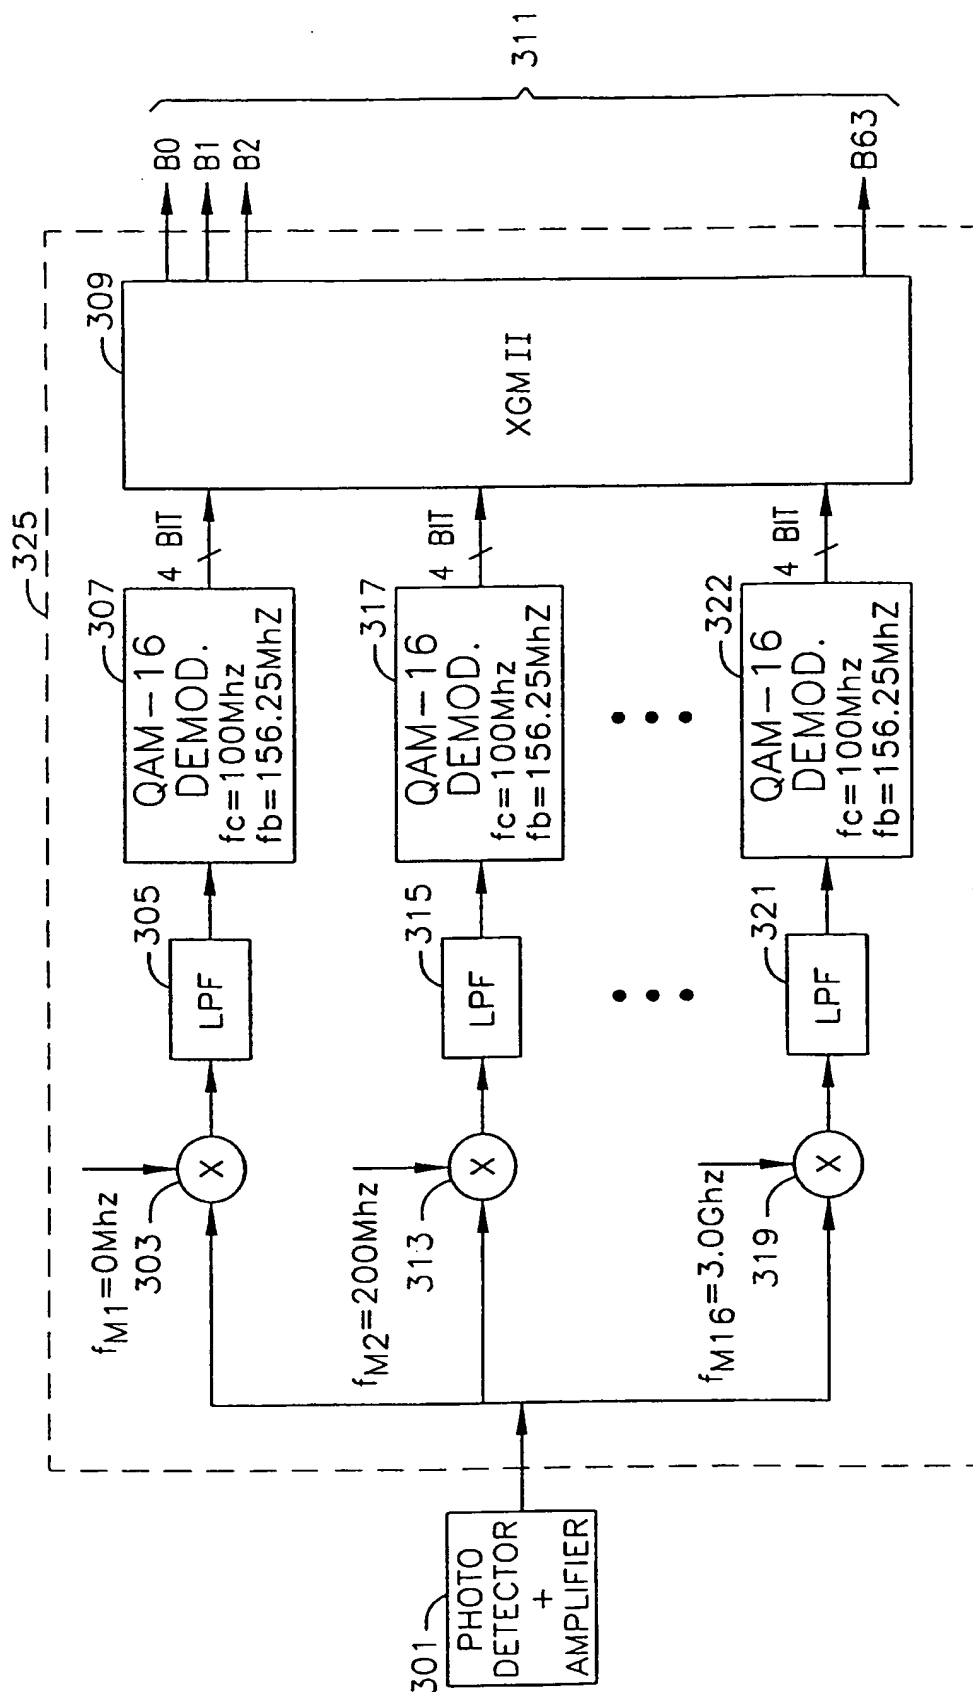


FIG.3

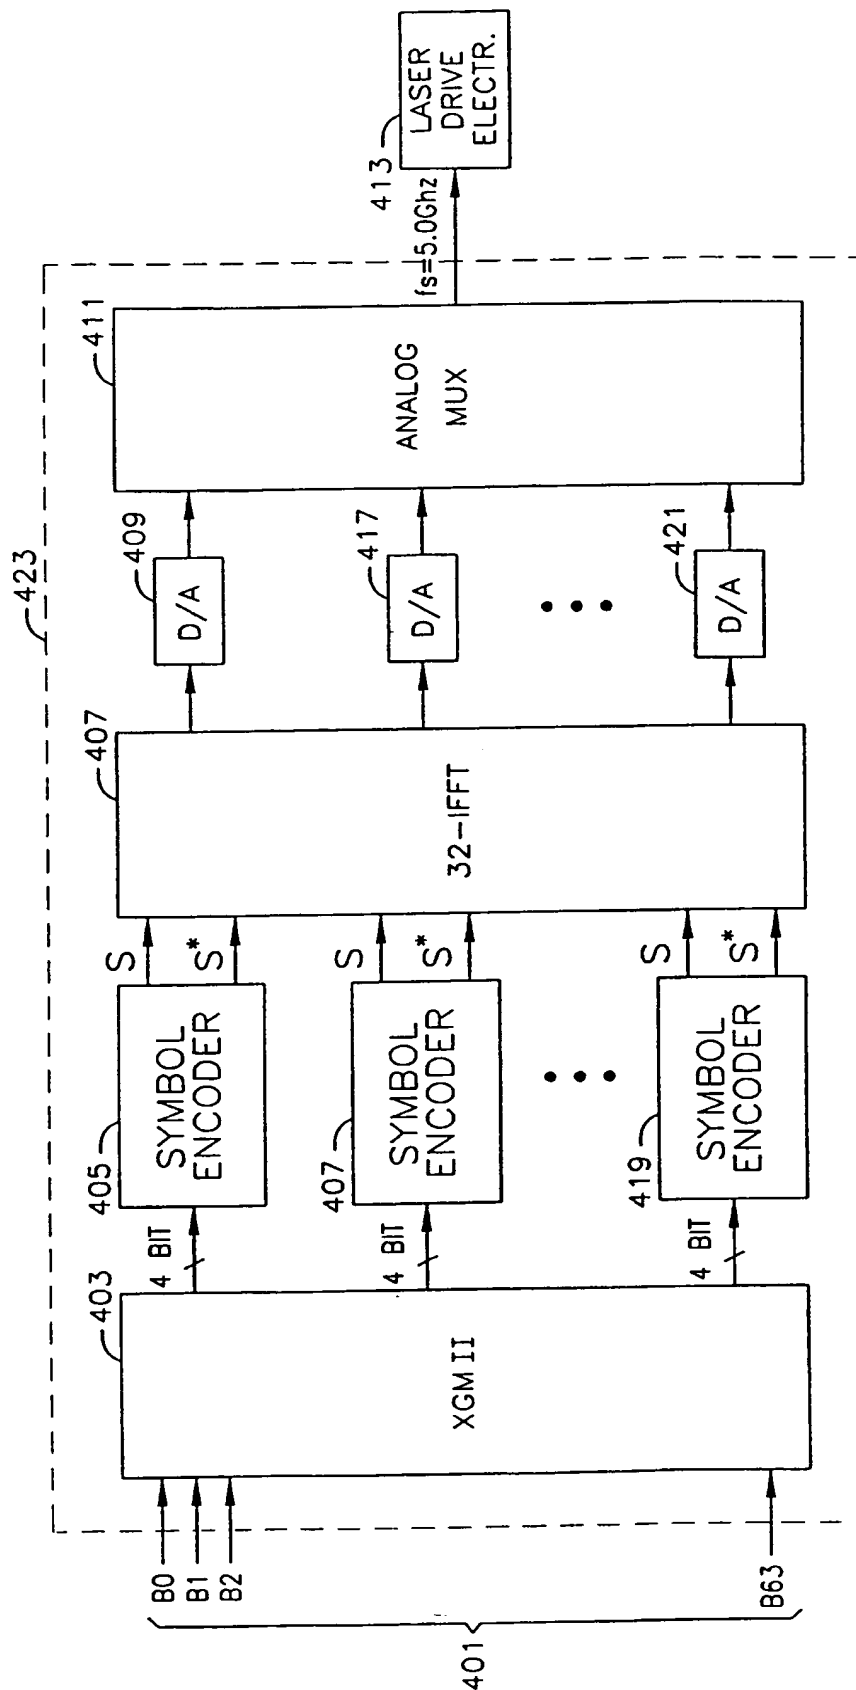


FIG. 4

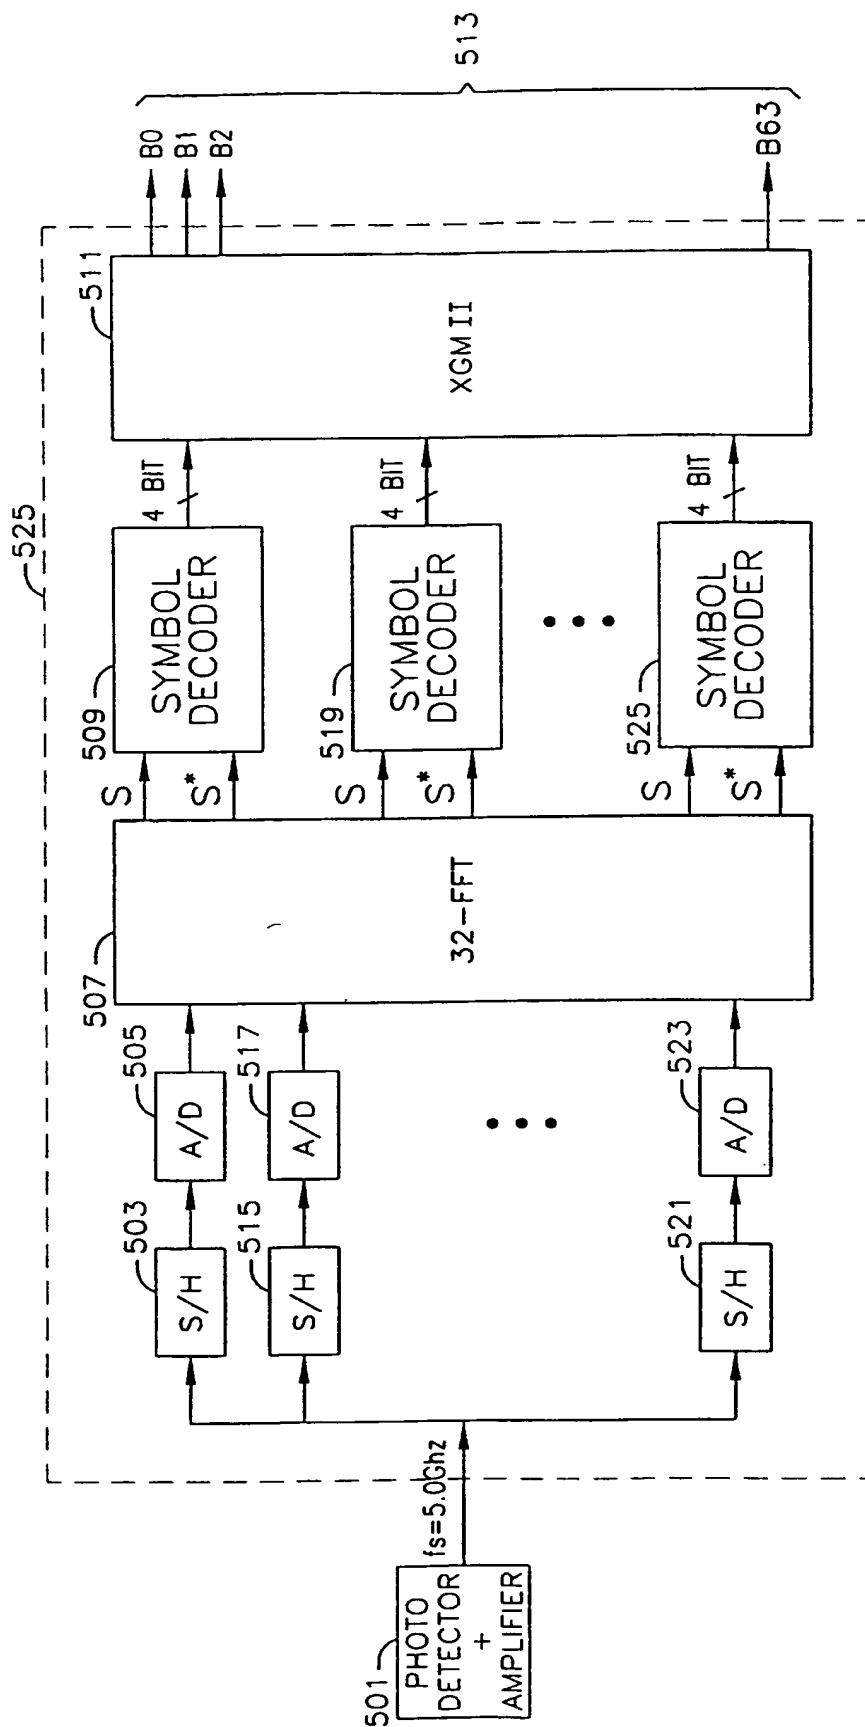
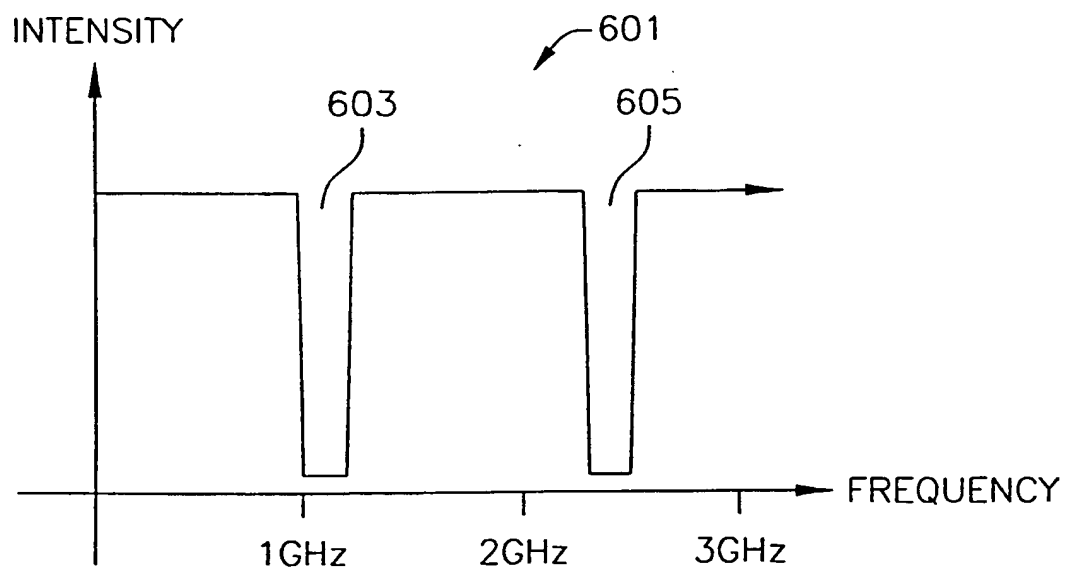


FIG. 5

10/18

*FIG. 6*

11/18

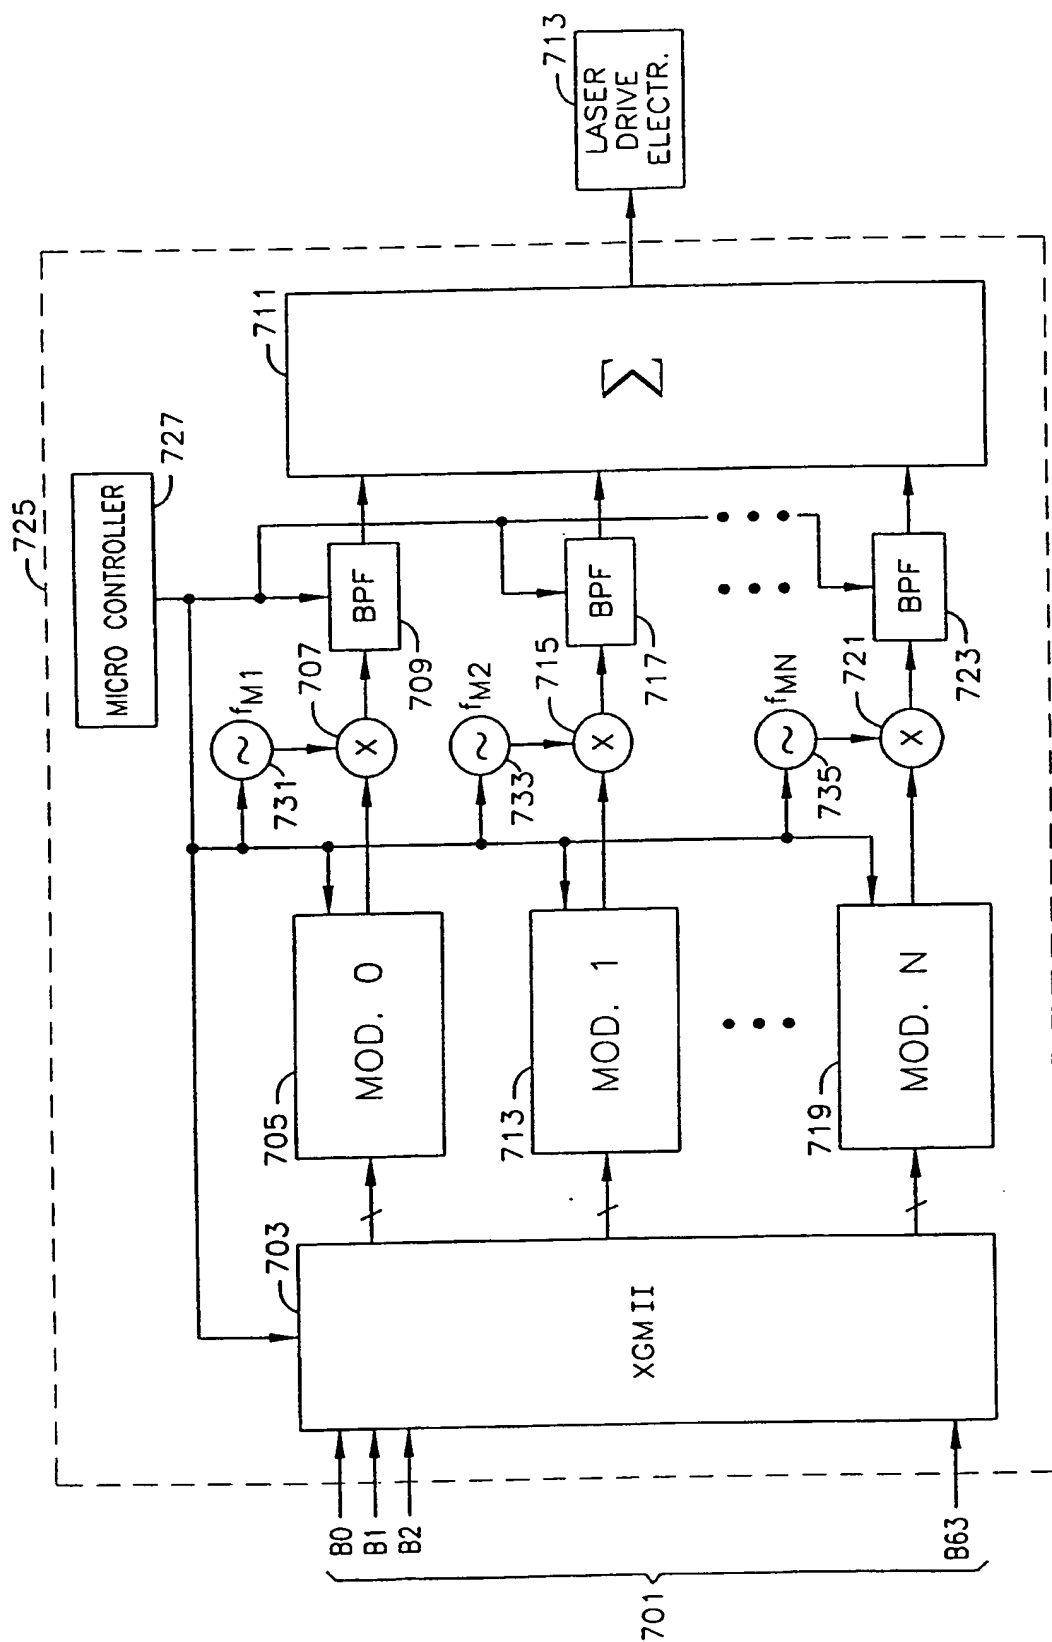
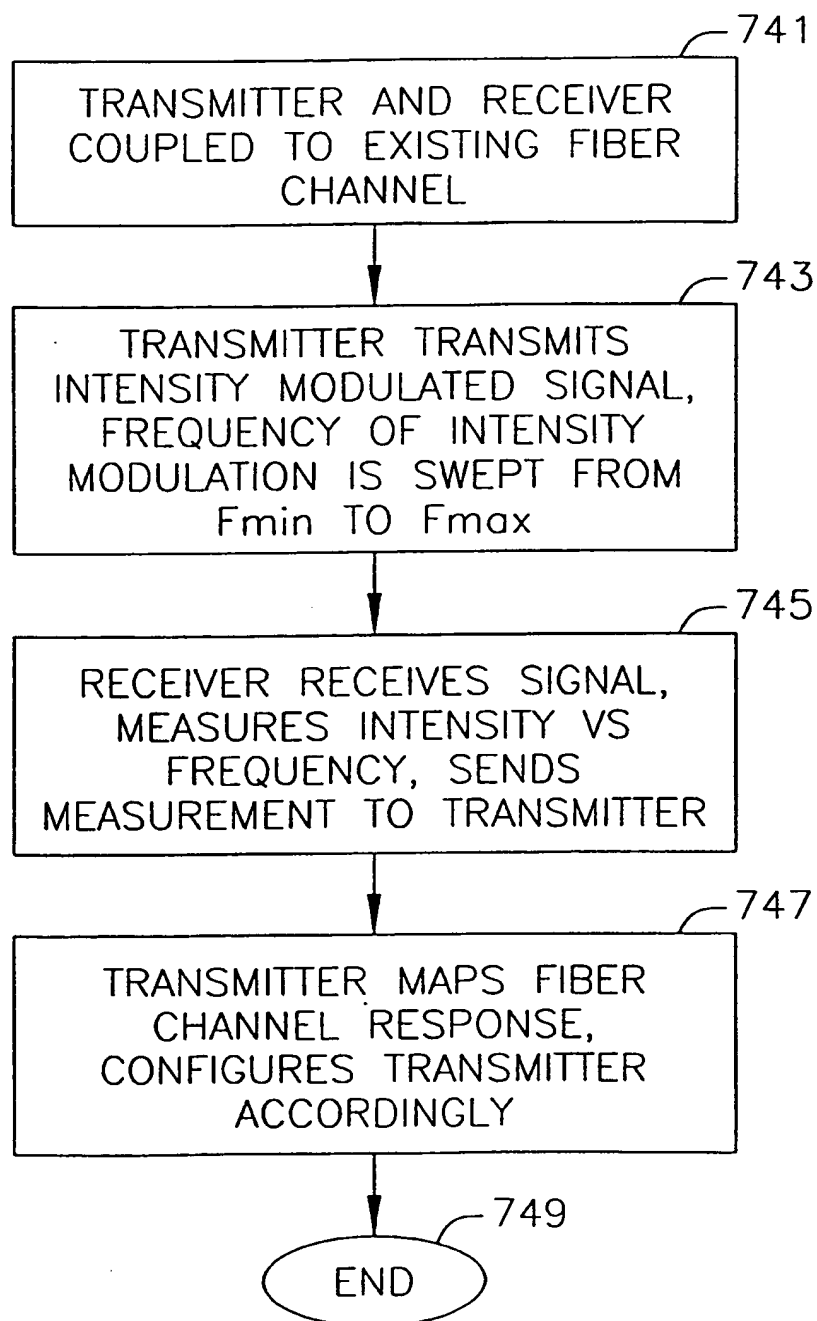


FIG. 7A

12/18

FIG. 7B

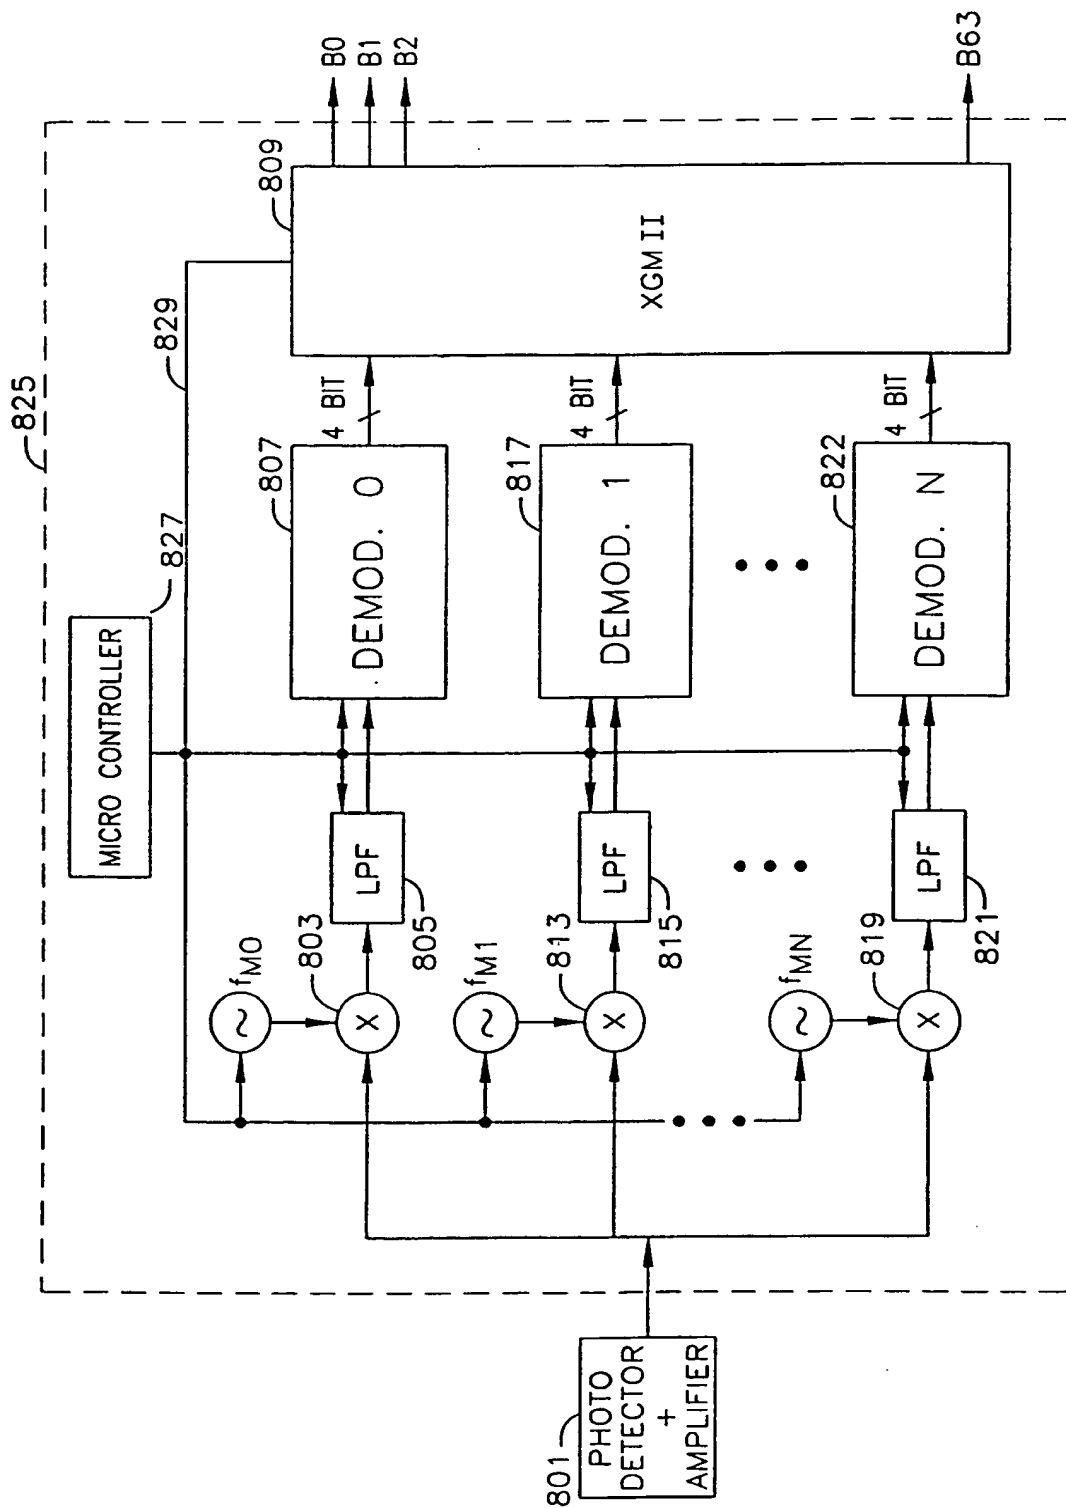
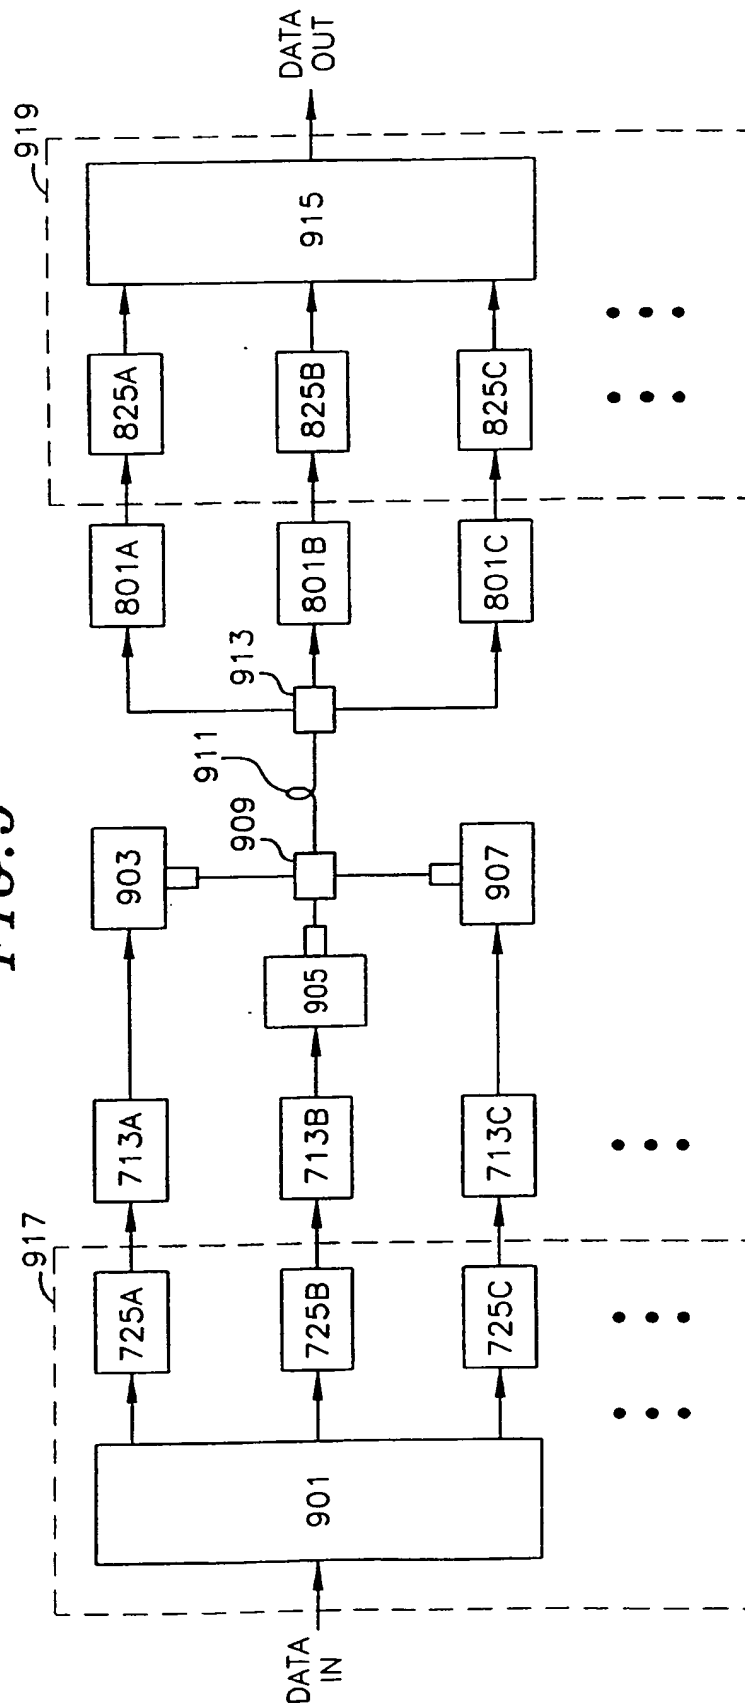


FIG. 8

FIG. 9



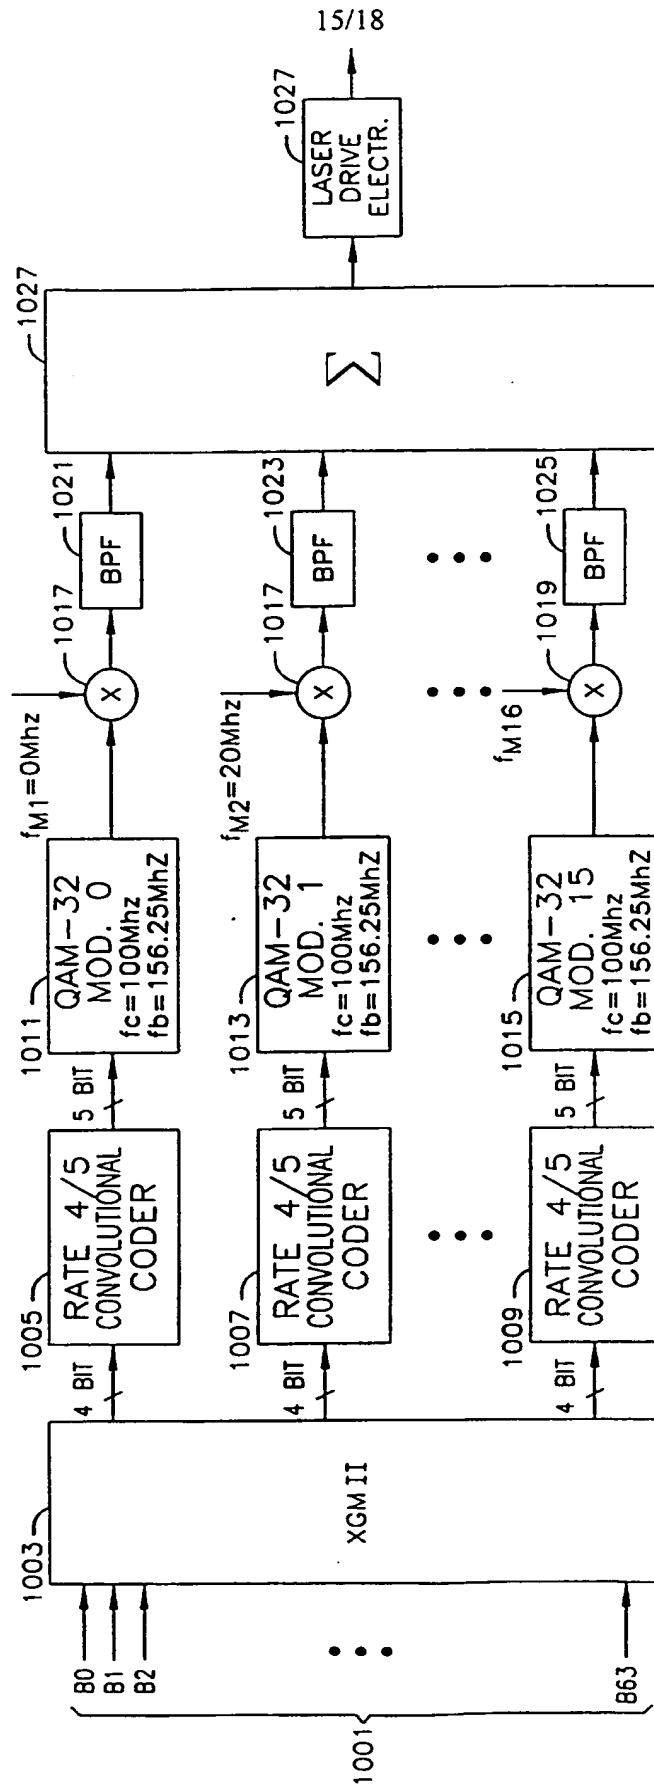


FIG. 10

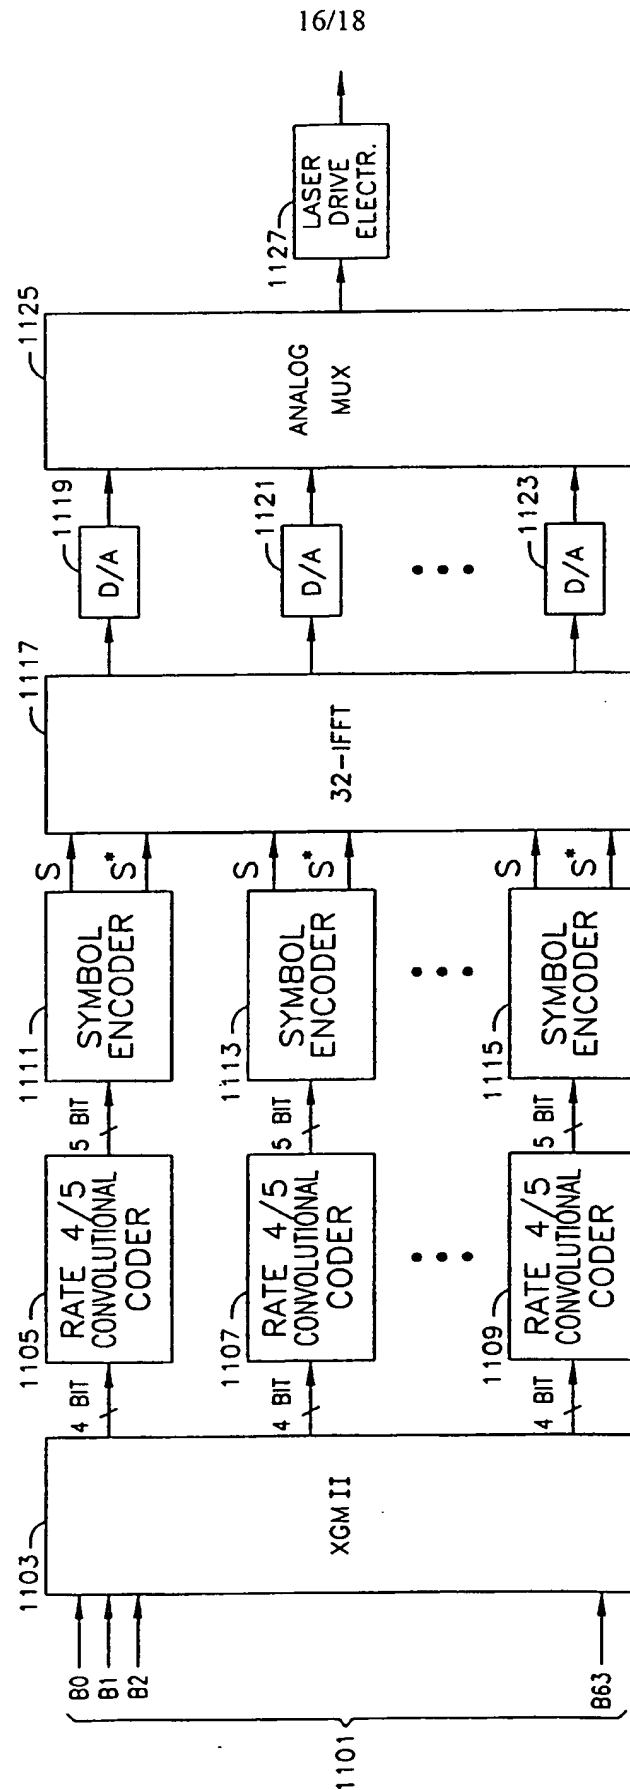


FIG. 11

17/18

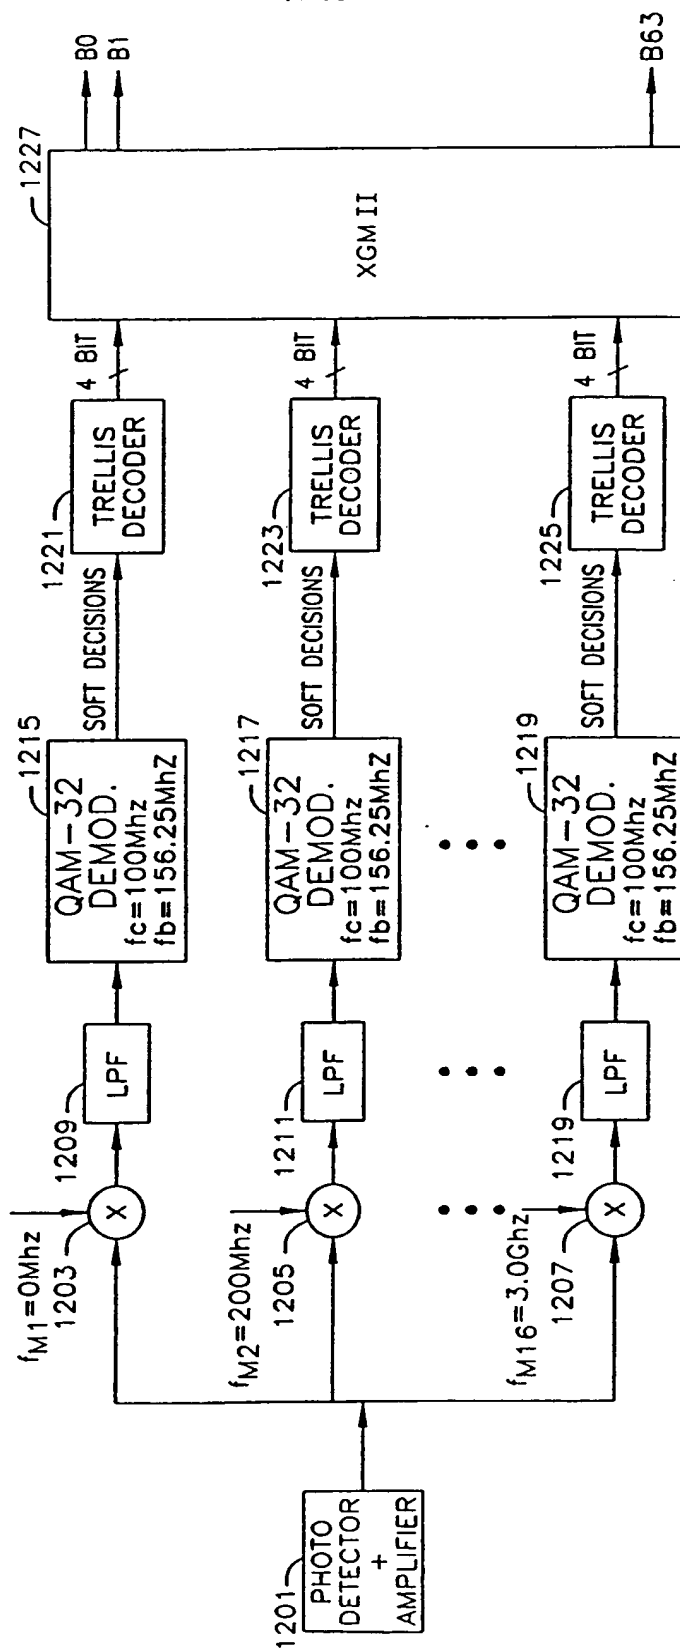


FIG. 12

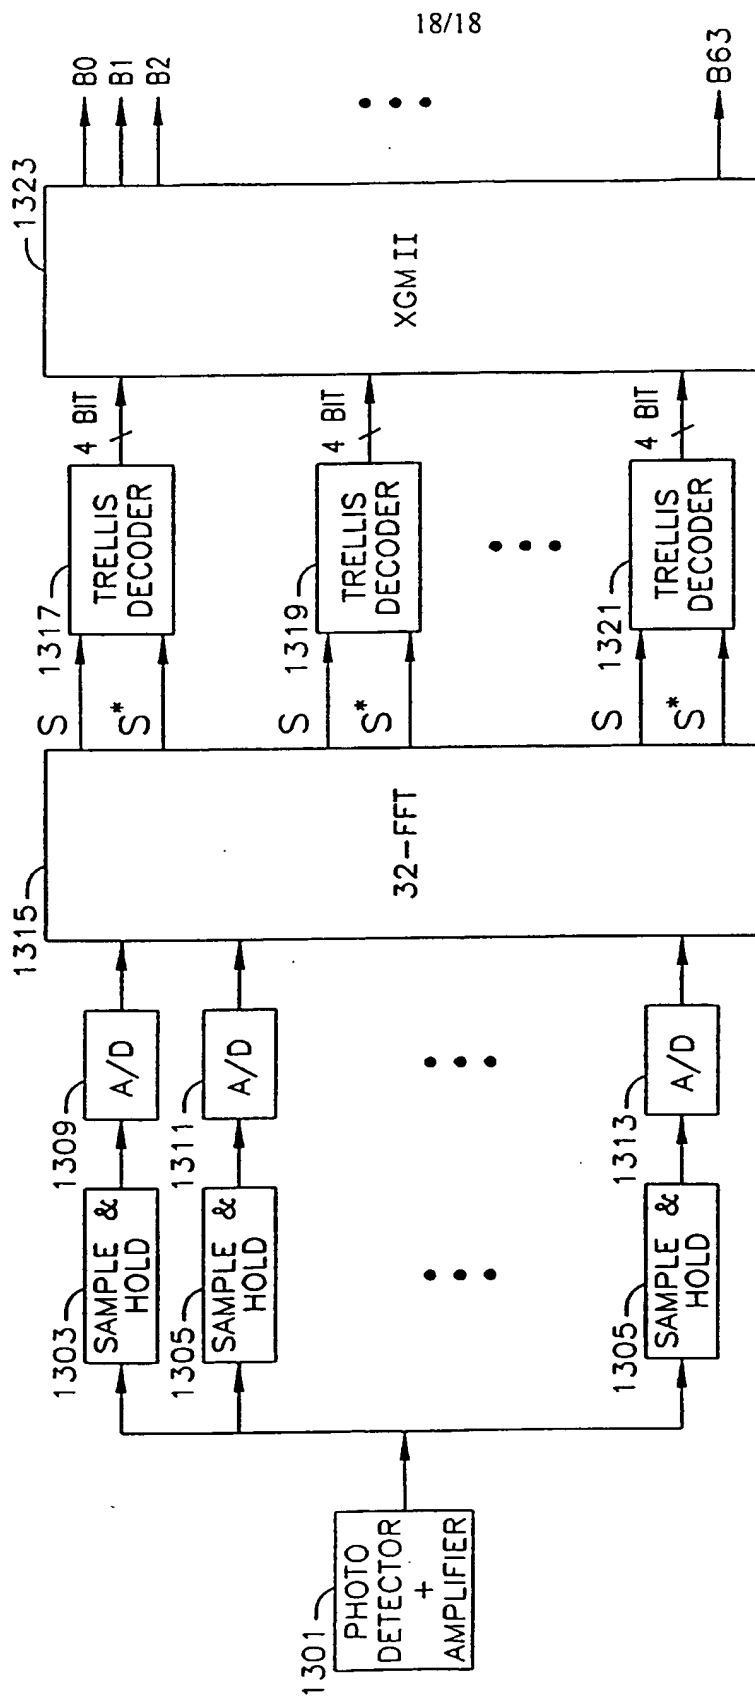


FIG. 13

(19) World Intellectual Property Organization
International Bureau



(43) International Publication Date
26 April 2001 (26.04.2001)

PCT

(10) International Publication Number
WO 01/29991 A3

(51) International Patent Classification⁷: H04L 27/26, 1/00

(21) International Application Number: PCT/US00/29136

(22) International Filing Date: 20 October 2000 (20.10.2000)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:
60/160,501 20 October 1999 (20.10.1999) US

(71) Applicant (for all designated States except US): **BROADCOM CORPORATION** [US/US]; 16215 Alton Parkway, Irvine, CA 92618 (US).

(72) Inventor; and

(75) Inventor/Applicant (for US only): **AGAZZI, Oscar, E.** [AR/US]; 16215 Alton Parkway, Irvine, CA 92618 (US).

(74) Agents: **WINSLADE, Christopher, C. et al.**; McAndrews Held & Malloy, Ltd., Suite 3400, 500 W. Madison Street, Chicago, IL 60661 (US).

(81) Designated States (*national*): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, BZ, CA, CH, CN, CR, CU, CZ, DE, DK, DM, DZ, EE, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NO, NZ, PL, PT, RO, RU, SD, SE, SG, SI, SK, SL, TJ, TM, TR, TT, TZ, UA, UG, US, UZ, VN, YU, ZA, ZW.

(84) Designated States (*regional*): ARIPO patent (GH, GM, KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, CH, CY, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GW, ML, MR, NE, SN, TD, TG).


Published:

— with international search report

(88) Date of publication of the international search report:
31 January 2002

For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.

(54) Title: METHOD, APPARATUS AND SYSTEM FOR HIGH-SPEED TRANSMISSION ON FIBER OPTIC CHANNEL

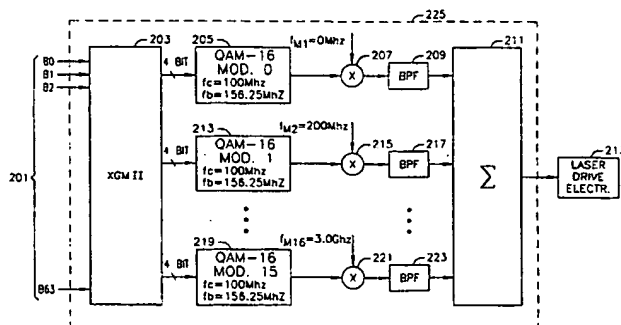

WO 01/29991 A3

(57) Abstract: Multi-carrier modulation fiber optic systems constructed using a series of electrical carriers, modulating the data (201) on the electrical carriers (207, 215, 221) and combining the carriers to form a wideband signal (211). The wideband signal can then be intensity modulated on a laser and coupled to a fiber optic channel (213). A receiver may then receive the laser signal from the fiber optic channel and convert it into an electrical signal (301, 325). Multi-carrier modulation may be applied to existing fiber channels, which may be of lower quality. Existing fiber channels may have characteristics which prevent or restrict the transmission of data using intensity modulation at certain frequencies (601). An adaptive multi-carrier modulation transmitter (725) may characterize an existing fiber optic channel and ascertain the overall characteristics of the channel. The transmitter and receiver (825) can then be configured to use various bandwidths and various modulations in order to match the transfer characteristic of the fiber channel (601). A series of adaptive multi-carrier modulation transmitters and receivers can be integrated on a single integrated circuit. If multiple adaptive receivers and transmitters are integrated on a single integrated circuit (917, 919), they may be used to upgrade existing networks by adding different wavelength lasers (903, 905, 907) for the transmission of data in order to achieve any capacity desired. Each receiver and transmitter may characterize the fiber for its particular wavelength laser and may configure the modulation and bandpass to the fiber's characteristics.

INTERNATIONAL SEARCH REPORT

Int. l. Application No

PCT/US 00/29136

A. CLASSIFICATION OF SUBJECT MATTER
IPC 7 H04L27/26 H04L1/00

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

IPC 7 H04L

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practical, search terms used)

WPI Data, PAJ, INSPEC, EPO-Internal

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X Y A	GB 2 271 693 A (MOTOROLA ISRAEL LTD) 20 April 1994 (1994-04-20) page 1, line 27 -page 2, line 7 page 9, line 16 - line 28 figures 1,2,7 ---	1-3, 8-10,15 4-6,11, 13,14, 18,22,23 7,12,16
X A	EP 0 789 464 A (MOBILE TELECOMM TECH) 13 August 1997 (1997-08-13) column 17, line 43 -column 19, line 8 column 19, line 35 -column 20, line 28 figures 11-14 --- -/--	1-5,8,9 6,7,22

☒ Further documents are listed in the continuation of box C.

☒ Patent family members are listed in annex.

* Special categories of cited documents :

- *A* document defining the general state of the art which is not considered to be of particular relevance
- *E* earlier document but published on or after the international filing date
- *L* document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)
- *O* document referring to an oral disclosure, use, exhibition or other means
- *P* document published prior to the international filing date but later than the priority date claimed

T later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention

X document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone

Y document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art.

G document member of the same patent family

Date of the actual completion of the international search

29 May 2001

Date of mailing of the international search report

07. 06. 2001

Name and mailing address of the ISA

European Patent Office, P.B. 5818 Patentlaan 2
NL - 2280 HV Rijswijk
Tel. (+31-70) 340-2040, Tx. 31 651 epo nl,
Fax: (+31-70) 340-3016

Authorized officer

Marselli, M.

INTERNATIONAL SEARCH REPORT

International Application No

PCT/US 00/29136

C.(Continuation) DOCUMENTS CONSIDERED TO BE RELEVANT		
Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X A	US 4 613 975 A (AOYAGI HIDEHITO ET AL) 23 September 1986 (1986-09-23) abstract column 2, line 35 -column 4, line 45 figures 1,3,4 ---	1,2, 8-10,15 3-7, 11-14, 22,23
X Y A	EP 0 869 647 A (LUCENT TECHNOLOGIES INC) 7 October 1998 (1998-10-07) abstract page 3, line 15 -page 5, line 1 page 6, line 1 - line 24 page 7, line 43 -page 8, line 16 figures 1,4 ---	16,17 4,5,13, 14,18, 19,22,23 1,3,10, 20,21
X A	US 5 479 447 A (CHOW PETER S ET AL) 26 December 1995 (1995-12-26) abstract column 1, line 52 -column 2, line 14 column 3, line 42 - line 57 column 7, line 35 -column 8, line 56 figures 7,9 ---	16 1,10, 17-21
Y A A	ANANASSO F ET AL: "SS-FDMA channelization and routing in advanced multibeam mobile satellite systems" FOURTH INTERNATIONAL CONFERENCE ON SATELLITE SYSTEMS FOR MOBILE COMMUNICATIONS AND NAVIGATION (CONF. PUBL. NO.294), LONDON, UK, 17-19 OCT. 1988, pages 259-263, XP001004797 1988, London, UK, IEE, UK ISBN: 0-85296-367-X page 259, right-hand column, line 14 -page 260, right-hand column, line 6 page 261, right-hand column, line 60 - last line figure 6 --- FRAZIER H M: "MEDIA INDEPENDENT INTERFACE CONCEPTS AND GUIDELINES" WESCON '95 CONFERENCE, SAN FRANCISCO, LA, USA, 7 - 9 November 1995, pages 348-353, XP000586592 ISSN: 1044-6036 page 348, left-hand column, line 1 -page 349, left-hand column, line 17 --- -/--	6,11,19 1,10,16 1,2,10, 15

INTERNATIONAL SEARCH REPORT

International Application No

PCT/US 00/29136

C.(Continuation) DOCUMENTS CONSIDERED TO BE RELEVANT

Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	<p>WU A -Y ET AL: "A FAST ALGORITHM FOR REDUCED-COMPLEXITY PROGRAMMABLE DSP IMPLEMENTATION OF THE IFFT/FFT IN DMT SYSTEMS"</p> <p>IEEE GLOBAL TELECOMMUNICATIONS CONFERENCE,US,NEW YORK, NY: IEEE, 1998, pages 833-838, XP000825870</p> <p>ISBN: 0-7803-4985-7</p> <p>page 833, left-hand column, line 19 -page 834, left-hand column, line 23</p> <p>figure 1</p> <p>---</p>	24,25
Y	<p>WO 99 00926 A (ERICSSON TELEFON AB L M)</p> <p>7 January 1999 (1999-01-07)</p> <p>page 4, line 13 -page 5, line 18</p> <p>figure 1</p> <p>---</p>	24,25
Y	<p>PATENT ABSTRACTS OF JAPAN</p> <p>vol. 1998, no. 09,</p> <p>31 July 1998 (1998-07-31)</p> <p>-& JP 10 107758 A (TOYO COMMUN EQUIP CO LTD), 24 April 1998 (1998-04-24)</p> <p>abstract</p> <p>figure 1</p> <p>---</p>	24,25
A	<p>LASSALLE R ET AL: "PRINCIPLES OF MODULATION AND CHANNEL CODING FOR DIGITAL BROADCASTING FOR MOBILE RECEIVERS"</p> <p>EBU REVIEW- TECHNICAL,BE,EUROPEAN BROADCASTING UNION. BRUSSELS, no. 224, 1 August 1987 (1987-08-01), pages 168-190, XP000560523</p> <p>ISSN: 0251-0936</p> <p>page 178, left-hand column, line 1 -page 180, left-hand column, line 13</p> <p>figure 14</p> <p>---</p>	24,25
P,X	<p>EP 0 957 615 A (TEXAS INSTRUMENTS INC)</p> <p>17 November 1999 (1999-11-17)</p> <p>page 5, line 18 -page 6, line 10</p> <p>figure 2</p> <p>-----</p>	24,25

INTERNATIONAL SEARCH REPORT

international application No.
PCT/US 00/29136

Box I Observations where certain claims were found unsearchable (Continuation of item 1 of first sheet)

This International Search Report has not been established in respect of certain claims under Article 17(2)(a) for the following reasons:

1. ☐ Claims Nos.:
because they relate to subject matter not required to be searched by this Authority, namely:
2. ☐ Claims Nos.:
because they relate to parts of the International Application that do not comply with the prescribed requirements to such an extent that no meaningful International Search can be carried out, specifically:
3. ☐ Claims Nos.:
because they are dependent claims and are not drafted in accordance with the second and third sentences of Rule 6.4(a).

Box II Observations where unity of invention is lacking (Continuation of item 2 of first sheet)

This International Searching Authority found multiple inventions in this international application, as follows:

see additional sheet

1. ☒ As all required additional search fees were timely paid by the applicant, this International Search Report covers all searchable claims.
2. ☐ As all searchable claims could be searched without effort justifying an additional fee, this Authority did not invite payment of any additional fee.
3. ☐ As only some of the required additional search fees were timely paid by the applicant, this International Search Report covers only those claims for which fees were paid, specifically claims Nos.:
4. ☐ No required additional search fees were timely paid by the applicant. Consequently, this International Search Report is restricted to the invention first mentioned in the claims; it is covered by claims Nos.:

Remark on Protest

- ☐ The additional search fees were accompanied by the applicant's protest.
- ☒ No protest accompanied the payment of additional search fees.

FURTHER INFORMATION CONTINUED FROM PCT/ISA/ 210

This International Searching Authority found multiple (groups of) inventions in this international application, as follows:

1. Claims: 1-15 22-23

Wideband transmitters and receivers.

2. Claims: 16-21

Adaptation of a multicarrier modulator to the estimated channel response.

3. Claims: 24-25

Apparatuses for transmitting and receiving data with low bit error rate.

INTERNATIONAL SEARCH REPORT

Information on patent family members

Int. .tional Application No

PCT/US 00/29136

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
GB 2271693 A	20-04-1994	NONE	
EP 0789464 A	13-08-1997	US 5590403 A US 5754946 A AT 162915 T AU 5594494 A BR 9307436 A CA 2149125 A DE 69316771 D DE 69316771 T EP 0669062 A MX 9307095 A WO 9411960 A US 5581804 A US 5634198 A US 5915210 A	31-12-1996 19-05-1998 15-02-1998 08-06-1994 01-06-1999 26-05-1994 05-03-1998 24-09-1998 30-08-1995 30-06-1994 26-05-1994 03-12-1996 27-05-1997 22-06-1999
US 4613975 A	23-09-1986	JP 1031810 B JP 1548094 C JP 60047530 A CA 1226347 A GB 2147177 A,B	28-06-1989 09-03-1990 14-03-1985 01-09-1987 01-05-1985
EP 0869647 A	07-10-1998	US 6175550 B JP 10303849 A	16-01-2001 13-11-1998
US 5479447 A	26-12-1995	NONE	
WO 9900926 A	07-01-1999	SE 514736 C AU 8136898 A EP 0988732 A SE 9702550 A	09-04-2001 19-01-1999 29-03-2000 31-12-1998
JP 10107758 A	24-04-1998	NONE	
EP 0957615 A	17-11-1999	US 2001001007 A US 2001000220 A	10-05-2001 12-04-2001